


AMPLIMO Toroidal Output Transformer type 100PP2K2S



primary impedance	2200 Ω
secondary impedance	0 - 4 - 8 Ω
turns ratio	23.5 (4 Ω) - 16.6 (8 Ω)
UL-tap	35%
nominal power	100W
-3dB frequency bandwidth	5Hz - 175kHz
power bandwidth (-3dB) starting at	28Hz
primary inductance	670H
primary leakage ind.	3.8mH
primary capacitance	345pF
primary DC-resistance	190 Ω
secondary DC-resistance	80m Ω (4 Ω) 150m Ω (8 Ω)
dimensions od x height	113mm x 53mm
mounting	toroidal clamp & washers
weight	2.2kg

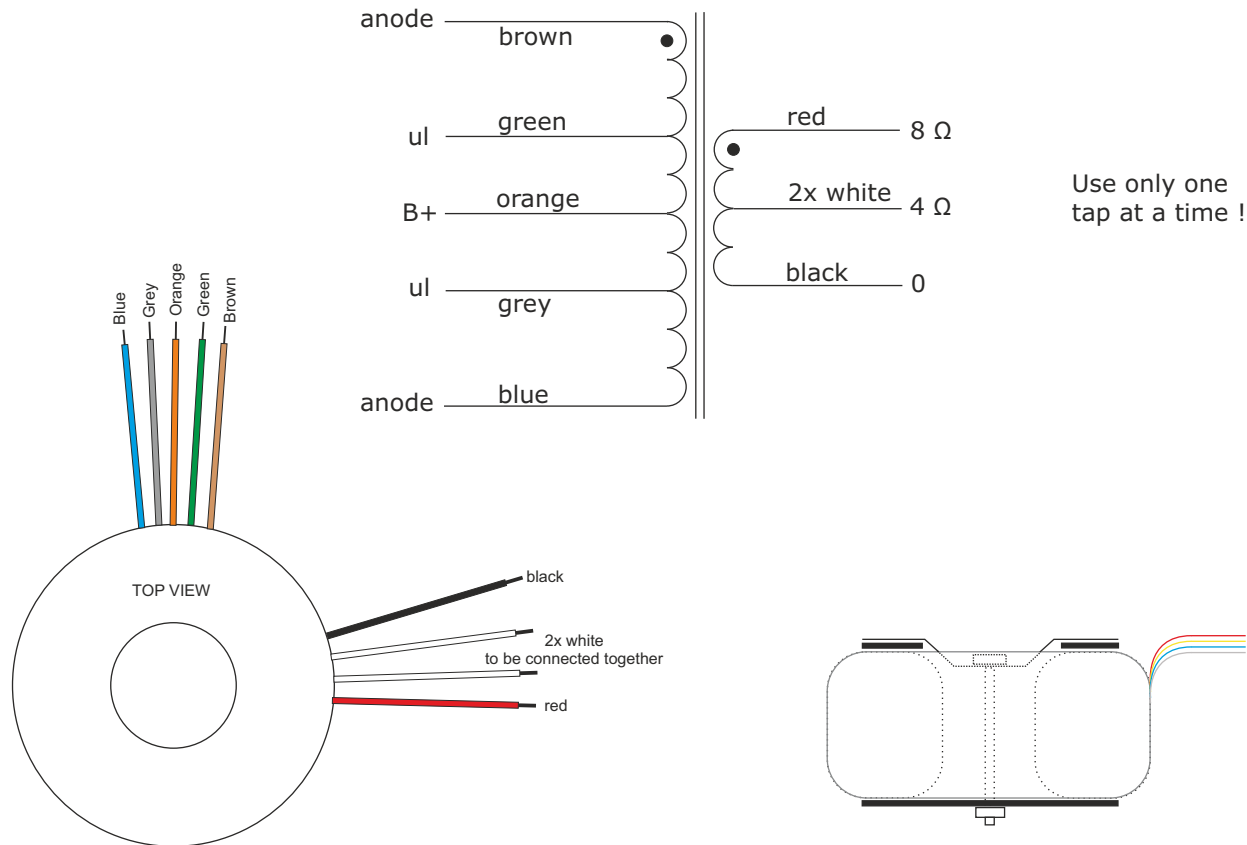

Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456

info@amplimo.nl
<http://www.amplimo.nl>

HB

May 2020

100PP2K2S

Wide bandwidth toroidal
tube output transformer

© Copyright Amplimo BV

