


AMPLIMO Toroidal Output Transformer type 12SE3K3H



ALL UNUSED WIRES, NEED TO BE INSULATED WITH HEATSHRINK !

primary impedance	3250 Ω
secondary impedance	0 - 4 - 8 Ω
turns ratio	28.4 (4Ω) - 20.1 (8Ω)
UL-tap	40%
nominal power	12W
nominal primary DC current	86mA
primary saturation current	172mA
-3dB frequency bandwidth (1mW)	14Hz - 85kHz
power bandwidth (-3dB) starting at	19Hz
primary inductance	26H
primary leakage ind.	14mH
primary capacitance	550pF
primary DC-resistance	90Ω
secondary DC-resistance	0.30Ω(4Ω), 0.48mΩ(8Ω)
dimensions (od x height)	126mm x 65mm
mounting	M8x20 center bolt
weight	2.8kg
Leadlength	200mm

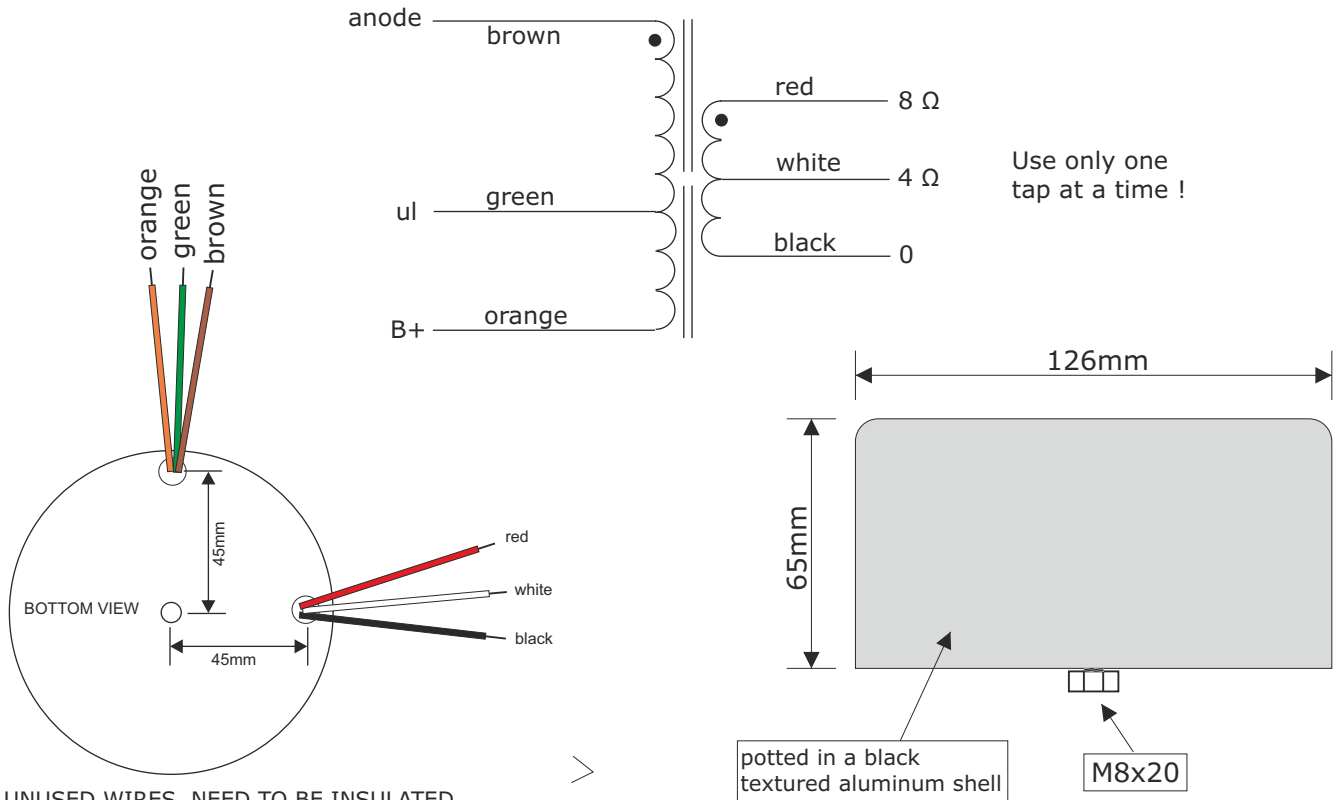

Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457

info@amplimo.nl
http://www.amplimo.nl

HB


March 2021

12SE3K3H

Wide bandwidth toroidal
tube output transformer

© Copyright Amplimo BV

12SE3K3H - frequency response

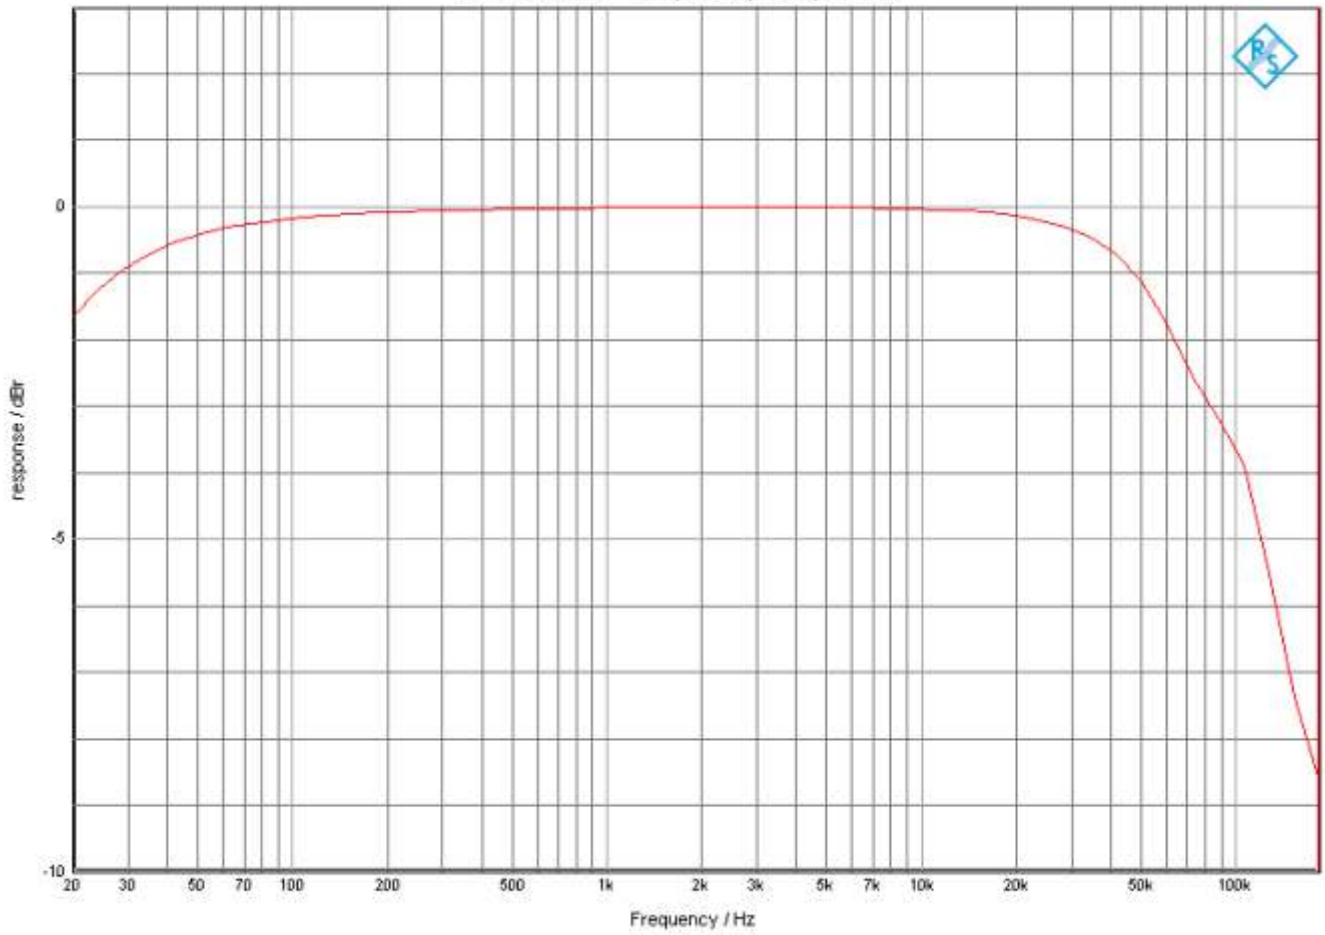

12SE3K3H - Phase response

