


AMPLIMO Toroidal Output Transformer type 25PP8K0G



primary impedance	8000 Ω
secondary impedance	0 - 4 - 8 - 16 Ω
turns ratio	45(4Ω)-32(8Ω)-22.5(16Ω)
nominal power	25W
-3dB frequency bandwidth (1mW)	4Hz - 93kHz
power bandwidth (-3dB) starting at	50Hz (25W)
primary inductance	840H
primary leakage ind.	8mH
primary capacitance	630pF
primary DC-resistance	114Ω
secondary DC-resistance	125mΩ(4Ω) 185mΩ(8Ω) 370mΩ(8Ω)
dimensions od x height	80mm x 36mm
mounting	toroidal clamp & washers
weight	630g

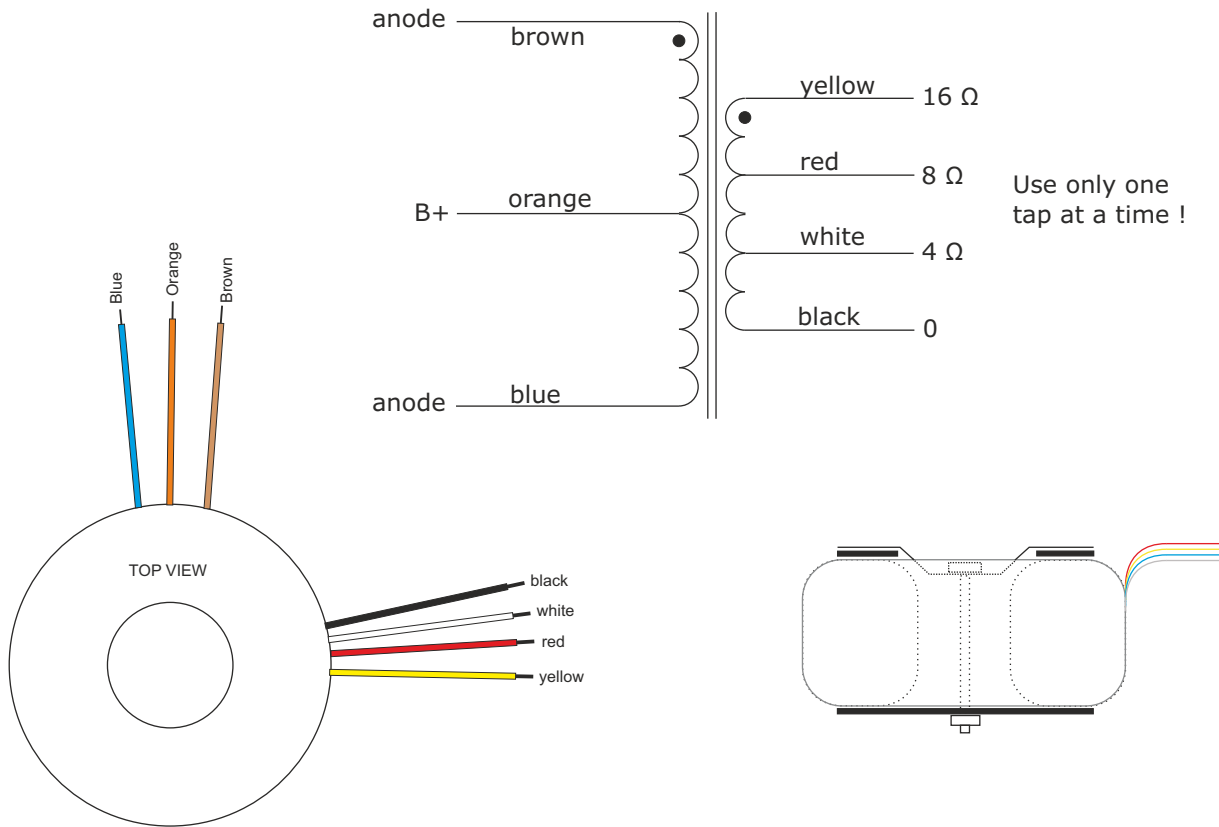

Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457

info@amplimo.nl
http://www.amplimo.nl

HB

May 2020

25PP8K0G

Wide bandwidth toroidal
tube output transformer

© Copyright Amplimo BV

