






Toroidal transformer type 08010

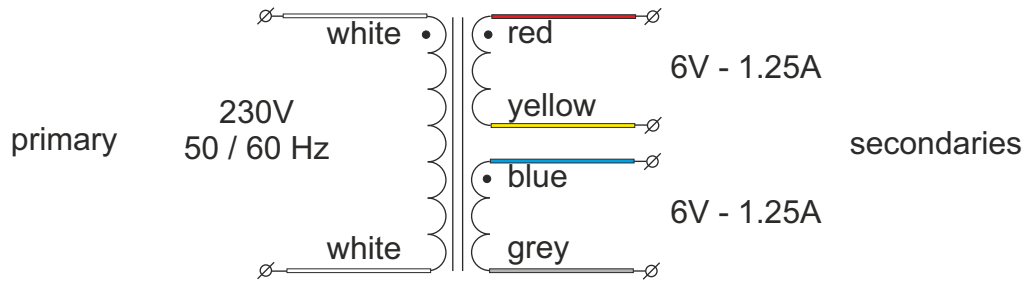

serial operation to double the secondary voltage

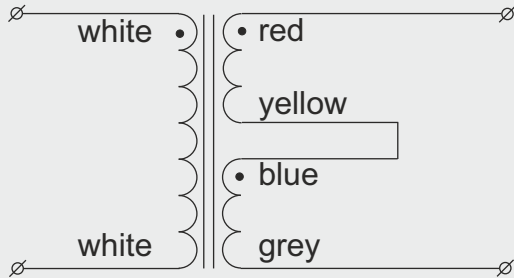

parallel operation to double the secondary current

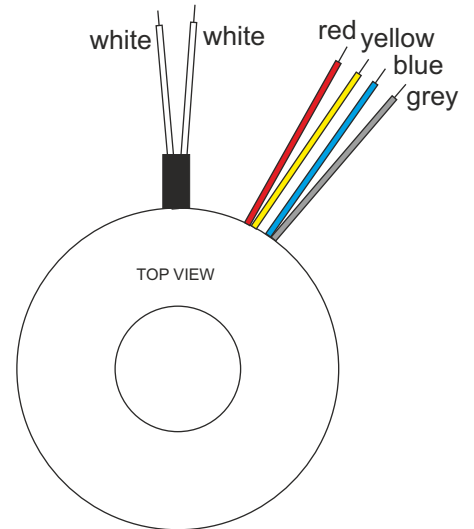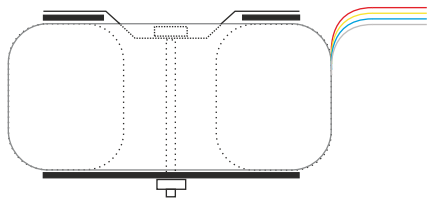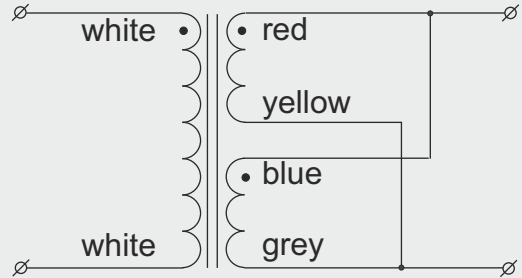

Power rating 15VA
 Primary voltage 230VAC - 50/60Hz
 Secondary voltages 2x 6V - 1.25A
 Regulation 19%

Diameter 60mm
 Height 28mm
 Weight 0.31kg

Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:

- 1 metal washer Ø50mm
- 2 neoprene washers Ø50mm
- 1 bolt M5x40mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.

Primary: 0.08A, 5x20mm, IEC127, high I²t value
 Secondary: none



Industrieweg 14
 NL-7161BX NEEDE
 The Netherlands

P O - B o x 2 7
 NL-7160AA NEEDE
 The Netherlands
 Tel.+31 (0)545 28 3456
 Fax+31 (0)545 28 3457

info@amplimo.nl
 http://www.amplimo.nl

HB

Oct 2010

08010

**toroidal transformer
 15VA**

© Copyright Amplimo BV