






Toroidal transformer type 08011

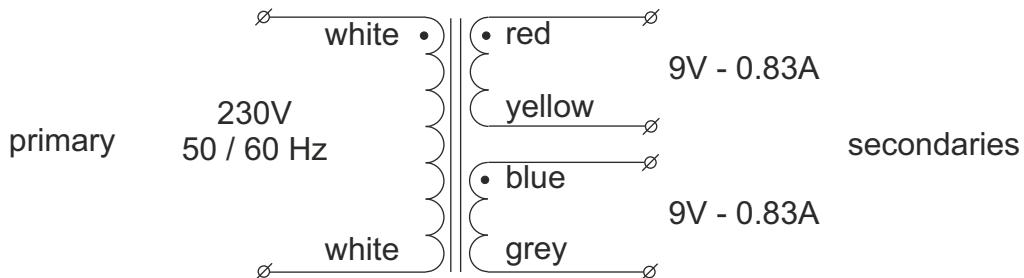

serial operation to double the secondary voltage

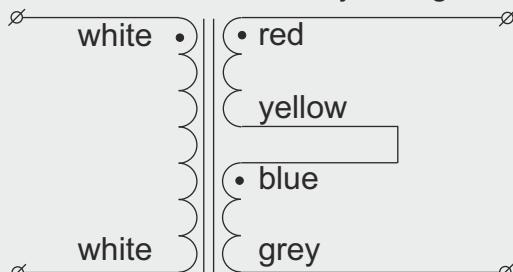

parallel operation to double the secondary current

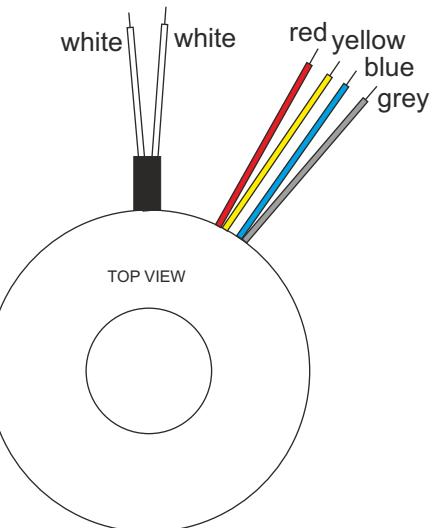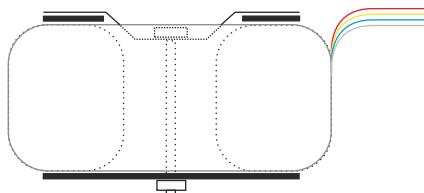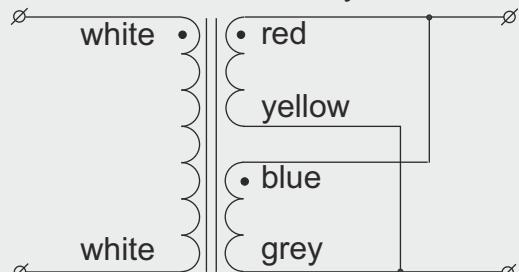

Power rating	15VA
Primary voltage	230VAC - 50/60Hz
Secondary voltages	2x 9V - 0.83A
Regulation	19%
Diameter	60mm
Height	28mm
Weight	0.31kg


Height and weight are measured without mounting materials
All leads are solid and approx 200mm long

Supplied mounting materials:

- 1 metal washer Ø50mm
- 2 neoprene washers Ø50mm
- 1 bolt M5x40mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.01
UL/CSA approvals, UL filenumber E320377.
CE, RoHS-compliant

Time lag fuses to be used.
Primary: 0.08A, 5x20mm, IEC127, high I^2t value
Secondary: none

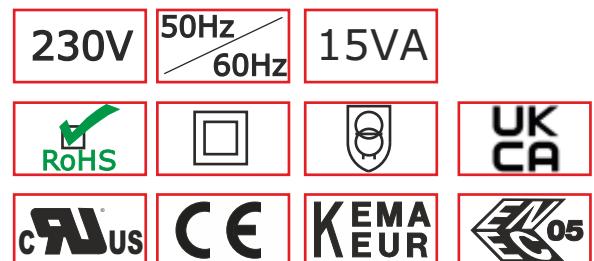

Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 28 3456

info@amplimo.nl
http://www.amplimo.nl

HB	Oct 2010
HB	Oct 2023

© Copyright Amplimo BV

08011

toroidal transformer
15VA