
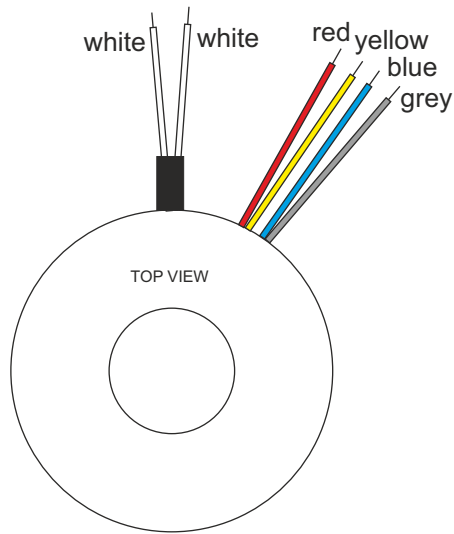
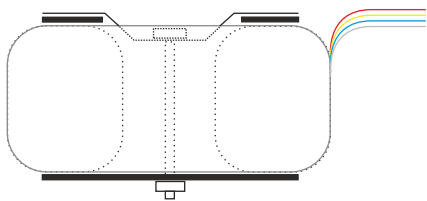
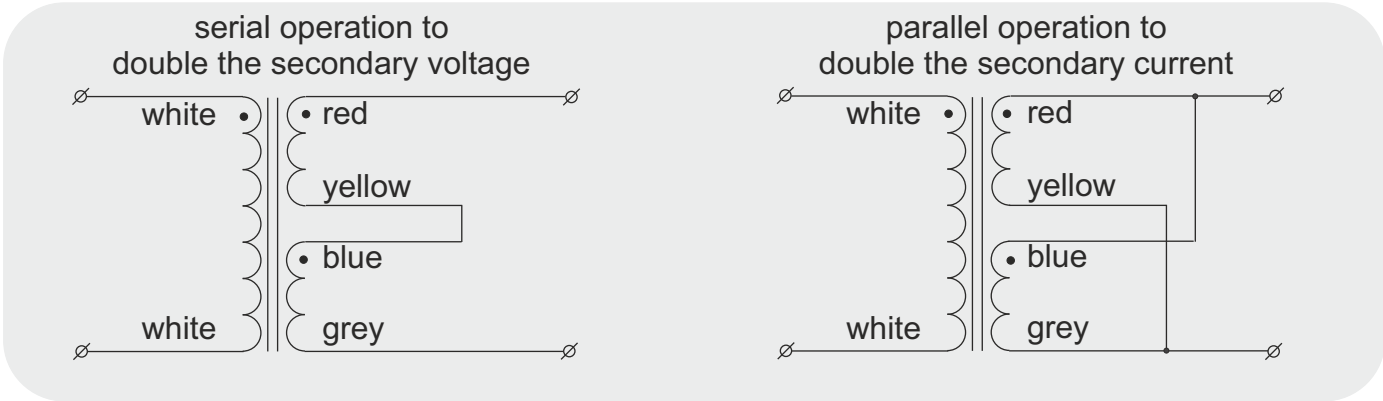


Toroidal transformer type 18013

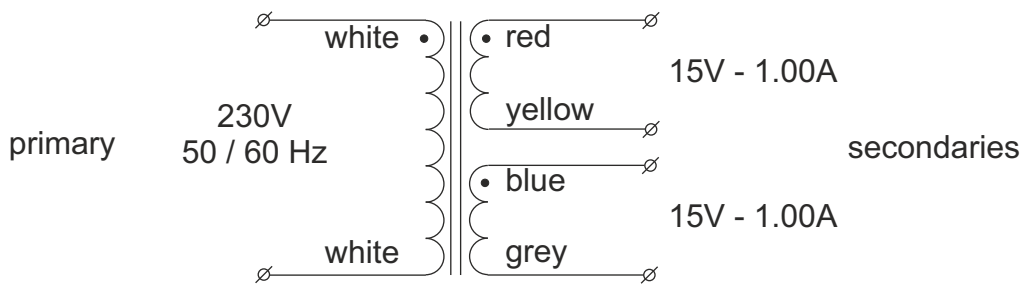


Power rating 30VA
Primary voltage 230VAC - 50/60Hz
Secondary voltages 2x 15V - 1.00A
Regulation 17%

Diameter 70mm
Height 32mm
Weight 0.44kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø50mm
 2 neoprene washers Ø50mm
 1 bolt M5x40mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.01
 UL/CSA approvals, UL filenumber E320377.
 CE, RoHS-compliant

Time lag fuses to be used.
 Primary: 0.16A, 5x20mm, IEC127, high I²t value
 Secondary: none

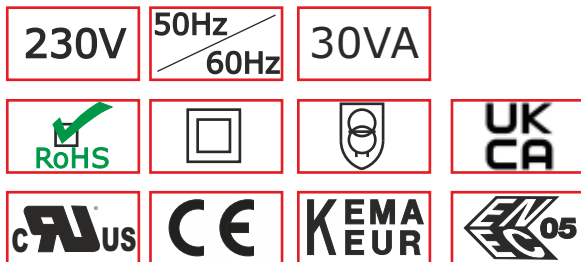

	Industrieweg 14 NL-7161BX NEEDE The Netherlands	HB HB	Oct 2010 Jan 2023	<h1>18013</h1> <p>toroidal transformer 30VA</p>
	P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 28 3456			
	info@amplimo.nl https://www.amplimo.nl	© Copyright Amplimo BV		