






## Toroidal transformer type 38010

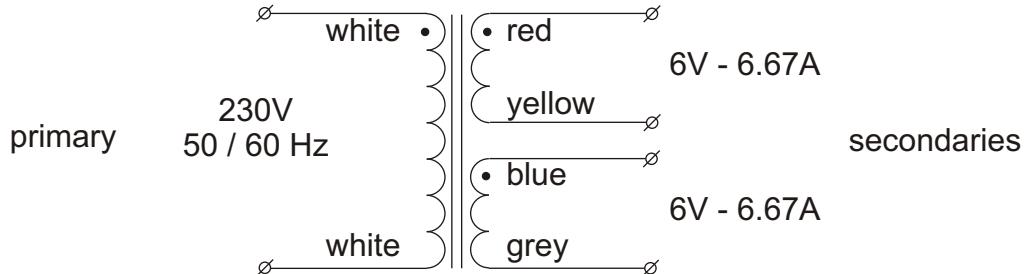

serial operation to double the secondary voltage

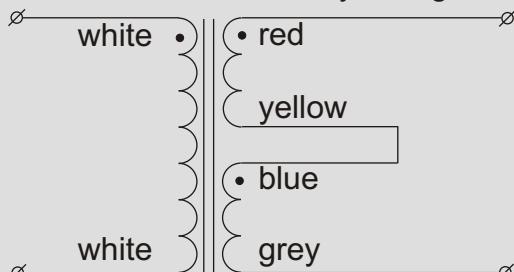

parallel operation to double the secondary current

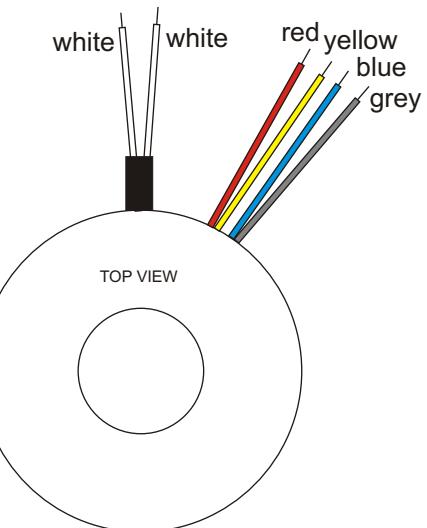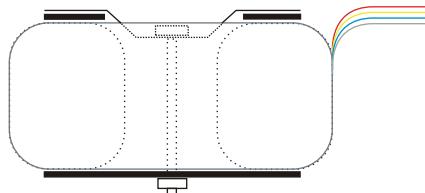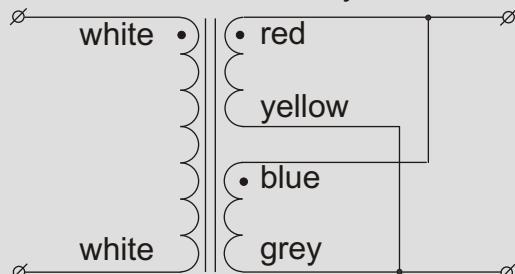

Power rating 80VA  
Primary voltage 230VAC - 50/60Hz  
Secondary voltages 2x 6V - 6.67A  
Regulation 10%

Diameter 91mm

Height 35mm

Weight 0.90kg

Height and weight are measured without mounting materials  
All leads are solid and approx 200mm long

Supplied mounting materials:

1 metal washer Ø70mm

2 neoprene washers Ø70mm

1 bolt M5x40mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals  
KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.

Primary: 0.4A, 5x20mm, IEC127, high  $I^2t$  value  
Secondary: none



Industrieweg 14  
NL-7161 BX NEEDE  
The Netherlands  
  
P O - B o x 2 7  
NL-7160 AA NEEDE  
The Netherlands  
Tel.+31 (0)545 28 3456  
Fax+31 (0)545 28 3457  
  
info@amplimo.nl  
http://www.amplimo.nl

HB

Oct 2010

38010

toroidal transformer  
80VA