






### Toroidal transformer type 48010

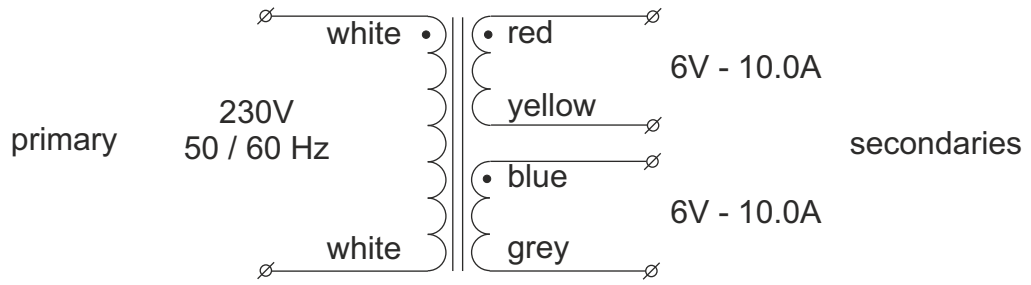

serial operation to double the secondary voltage

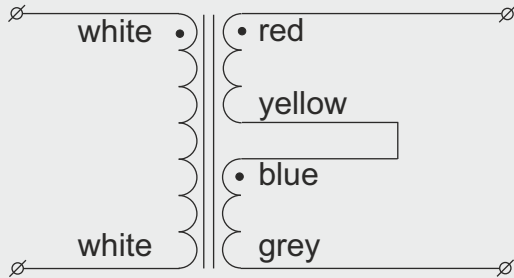

parallel operation to double the secondary current

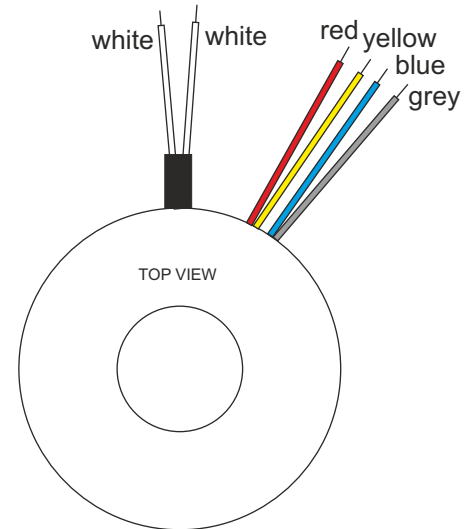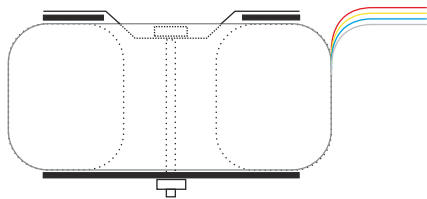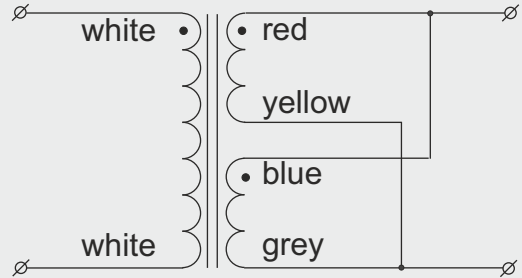

Power rating 120VA  
Primary voltage 230VAC - 50/60Hz  
Secondary voltages 2x 6V - 10.0A  
Regulation 8%

Diameter 91mm  
Height 49mm  
Weight 1.4kg  
Height and weight are measured without mounting materials  
All leads are solid and approx 200mm long

Supplied mounting materials:  
1 metal washer Ø70mm  
2 neoprene washers Ø70mm  
1 bolt M5x55mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.01  
UL/CSA approvals, UL filenumber E320377.  
CE, RoHS-compliant

Time lag fuses to be used.  
Primary: 0.63A, 5x20mm, IEC127, high I<sup>2</sup>t value  
Secondary: none



Industrieweg 14  
NL-7161BX NEEDE  
The Netherlands  
  
P O - B o x 2 7  
NL-7160AA NEEDE  
The Netherlands  
Tel.+31 (0)545 28 3456  
  
info@amplimo.nl  
https://www.amplimo.nl

|                        |          |
|------------------------|----------|
| HB                     | Oct 2010 |
| HB                     | Jan 2023 |
| © Copyright Amplimo BV |          |

**48010**  
toroidal transformer  
120VA