
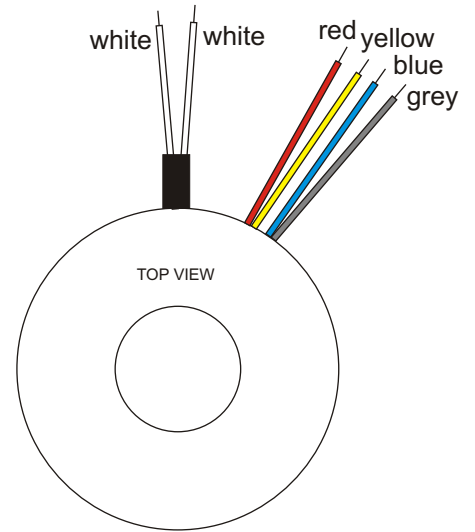
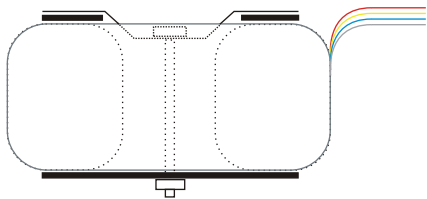
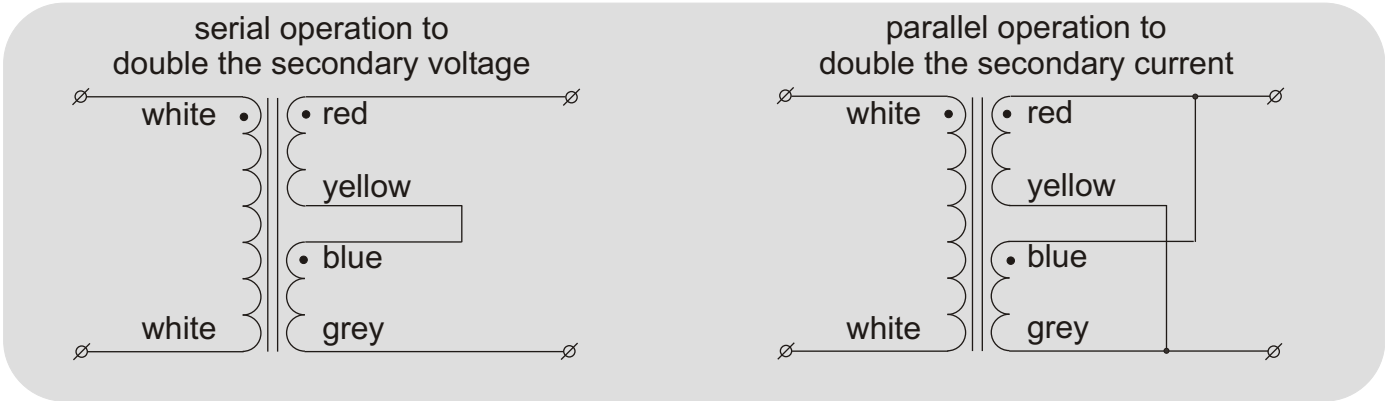


Toroidal transformer type 48012

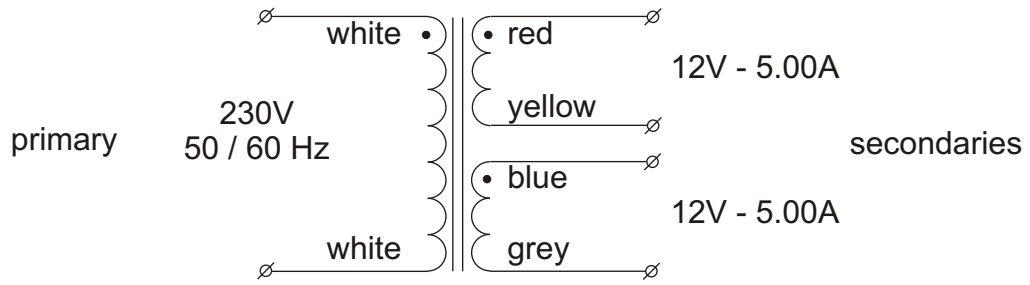

Power rating 120VA
Primary voltage 230VAC - 50/60Hz
Secondary voltages 2x 12V - 5.00A
Regulation 8%

Diameter 91mm
Height 49mm
Weight 1.4kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø70mm
 2 neoprene washers Ø70mm
 1 bolt M5x55mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.
 Primary: 0.63A, 5x20mm, IEC127, high I²t value
 Secondary: none

120VA	230V	50Hz / 60Hz	
	KEMA KEUR		
	CCA	CB	CE

	Industrieweg 14 NL-7161BX NEEDE The Netherlands P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 28 3456 Fax+31 (0)545 28 3457 info@amplimo.nl http://www.amplimo.nl	HB	Oct 2010	48012 toroidal transformer 120VA
	© Copyright Amplimo BV			