




Toroidal transformer type 48018

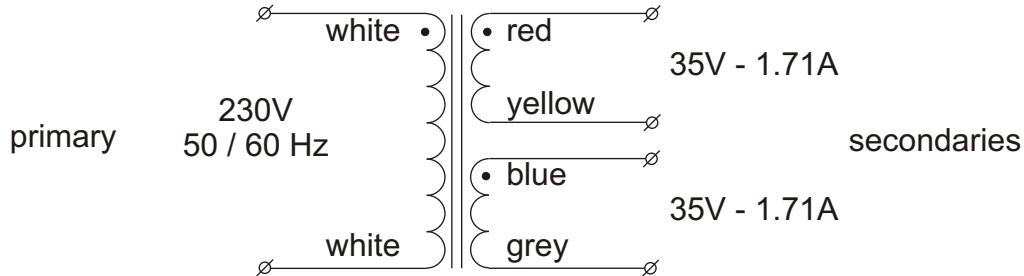

serial operation to double the secondary voltage

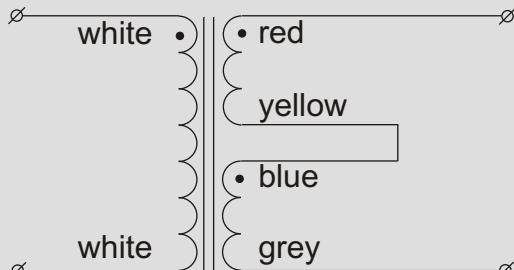

parallel operation to double the secondary current

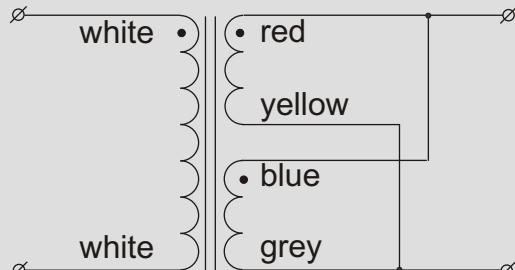

Power rating	120VA
Primary voltage	230VAC - 50/60Hz
Secondary voltages	2x 35V - 1.71A
Regulation	8%
Diameter	91mm
Height	49mm
Weight	1.4kg
Height and weight are measured without mounting materials	
All leads are solid and approx 200mm long	


Supplied mounting materials:

- 1 metal washer Ø70mm
- 2 neoprene washers Ø70mm
- 1 bolt M5x55mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.

Primary: 0.63A, 5x20mm, IEC127, high I^2t value
Secondary: none

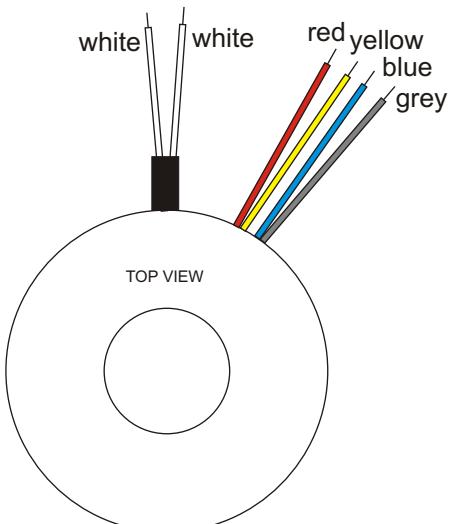

Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 28 3456
Fax+31 (0)545 28 3457

info@amplimo.nl
http://www.amplimo.nl

HB

Oct 2010

48018

toroidal transformer
120VA