






Toroidal transformer type 58010

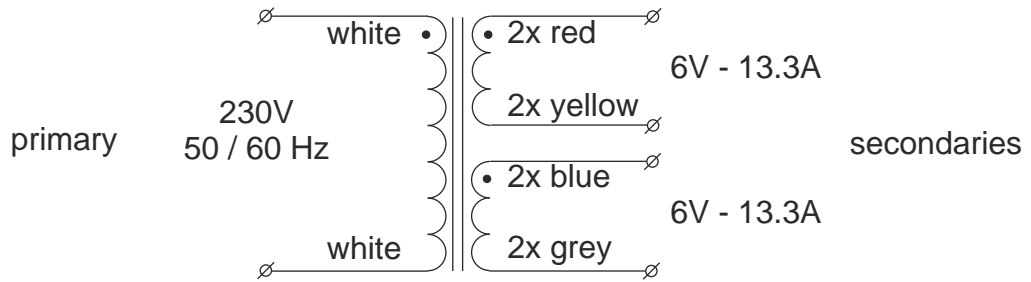

serial operation to
double the secondary voltage

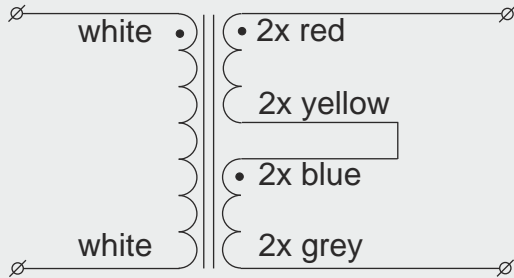

parallel operation to
double the secondary current

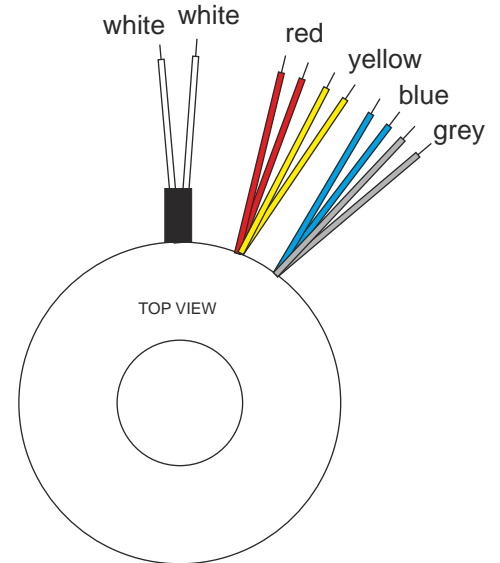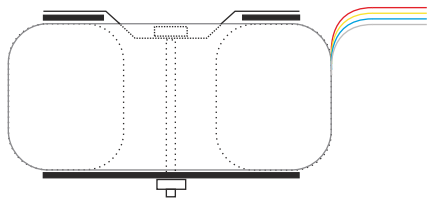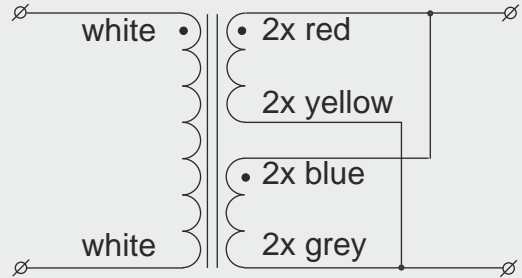


Power rating 160VA
 Primary voltage 230VAC - 50/60Hz
 Secondary voltages 2x 6V - 13.3A
 Regulation 7%

Diameter 110mm
 Height 43mm
 Weight 1.9kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø90mm
 2 neoprene washers Ø90mm
 1 bolt M5x50mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.
 Primary: 0.8A, 5x20mm, IEC127, high I²t value
 Secondary: none

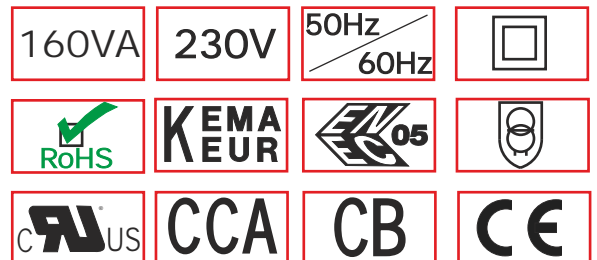

	Industrieweg 14 NL-7161BX NEEDE The Netherlands	HB	Oct 2010	58010
	P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 28 3456 Fax+31 (0)545 28 3457			
	info@amplimo.nl http://www.amplimo.nl	©	Copyright Amplimo BV	
			toroidal transformer 160VA	