
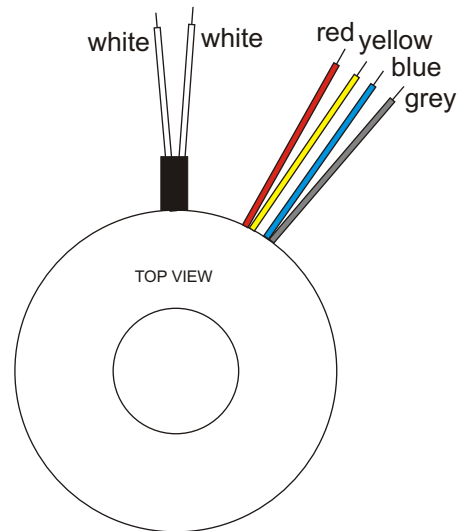
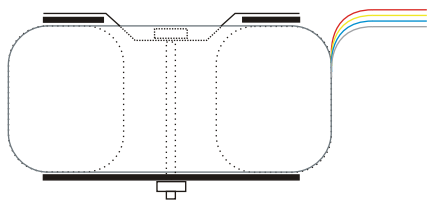
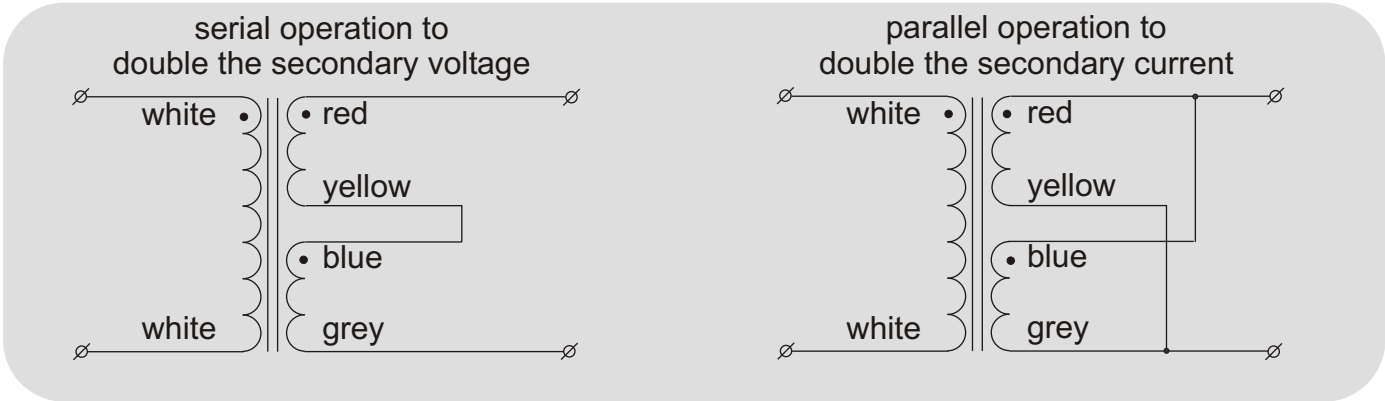


Toroidal transformer type 58015

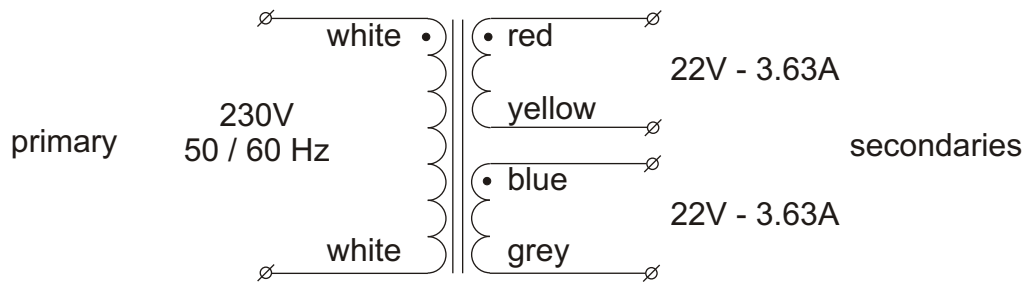

Power rating 160VA
Primary voltage 230VAC - 50/60Hz
Secondary voltages 2x 22V - 3.63A
Regulation 7%


Diameter 110mm
Height 43mm
Weight 1.9kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø90mm
 2 neoprene washers Ø90mm
 1 bolt M5x50mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.
 Primary: 0.8A, 5x20mm, IEC127, high I²t value
 Secondary: none



	Industrieweg 14 NL-7161BX NEEDE The Netherlands	HB	Oct 2010	58015 toroidal transformer 160VA	
	P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 28 3456 Fax+31 (0)545 28 3457				
	info@amplimo.nl http://www.amplimo.nl				
	© Copyright Amplimo BV				