
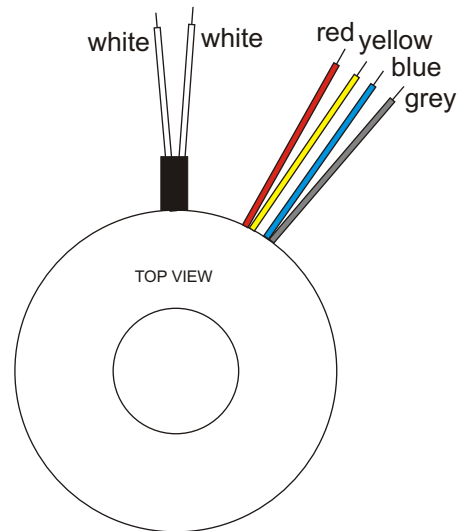
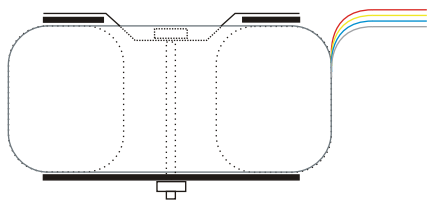
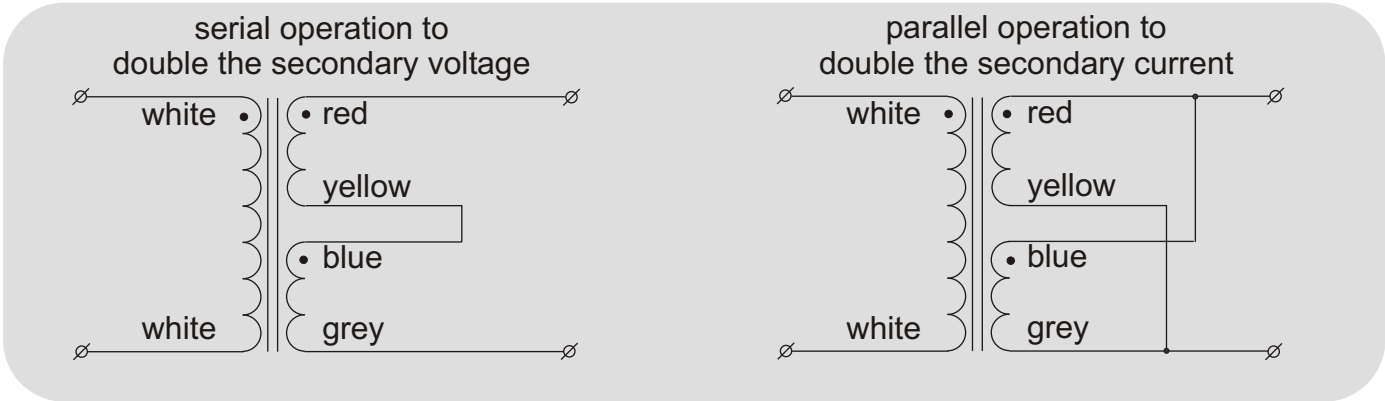


Toroidal transformer type 58018

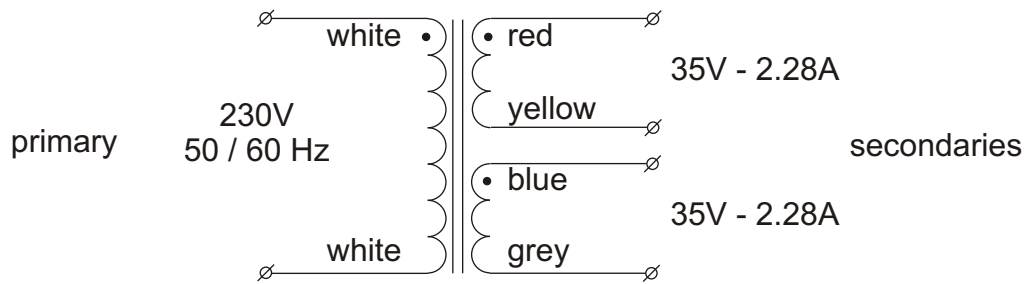

Power rating 160VA
Primary voltage 230VAC - 50/60Hz
Secondary voltages 2x 35V - 2.28A
Regulation 7%

Diameter 110mm
Height 43mm
Weight 1.9kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø90mm
 2 neoprene washers Ø90mm
 1 bolt M5x50mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.
 Primary: 0.8A, 5x20mm, IEC127, high I²t value
 Secondary: none

160VA	230V	50Hz / 60Hz	
	KEMA KEUR		
	CCA	CB	CE



Industrieweg 14
 NL-7161BX NEEDE
 The Netherlands

 P O - B o x 2 7
 NL-7160AA NEEDE
 The Netherlands
 Tel.+31 (0)545 28 3456
 Fax+31 (0)545 28 3457

 info@amplimo.nl
 http://www.amplimo.nl

HB Oct 2010

 © Copyright Amplimo BV

58018
 toroidal transformer
 160VA