






Toroidal transformer type 58019

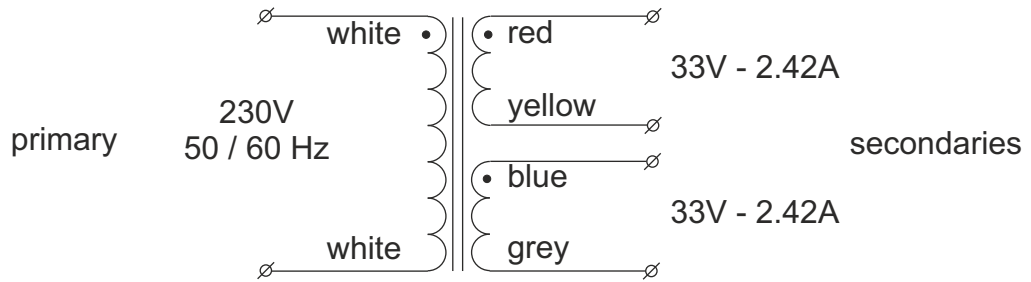

serial operation to double the secondary voltage

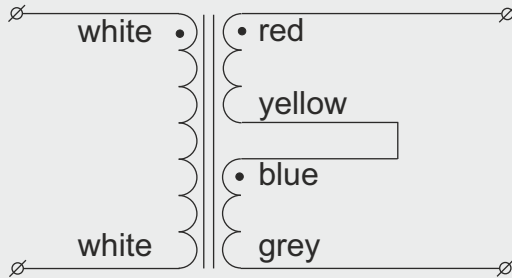

parallel operation to double the secondary current

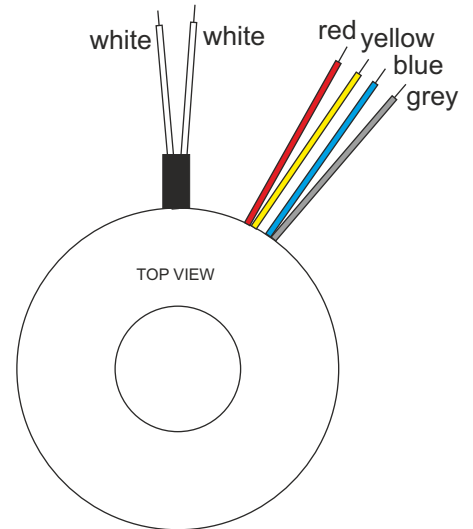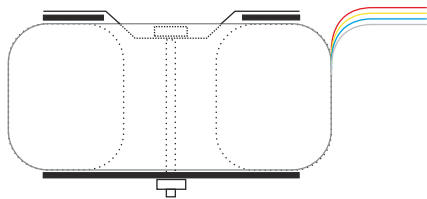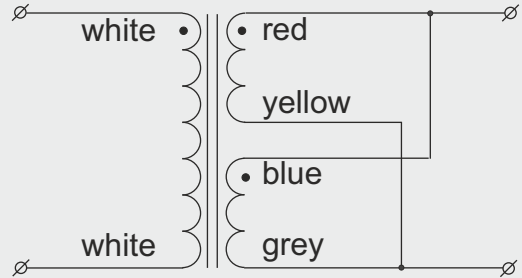

Power rating 160VA
Primary voltage 230VAC - 50/60Hz
Secondary voltages 2x 33V - 2.42A
Regulation 7%


Diameter 110mm
Height 43mm
Weight 1.9kg
Height and weight are measured without mounting materials
All leads are solid and approx 200mm long

Supplied mounting materials:
1 metal washer Ø90mm
2 neoprene washers Ø90mm
1 bolt M5x50mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.01
UL/CSA approvals, UL filenumber E320377.
CE, RoHS-compliant

Time lag fuses to be used.
Primary: 0.8A, 5x20mm, IEC127, high I²t value
Secondary: none

230V 50Hz / 60Hz 160VA



Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 28 3456

info@amplimo.nl
https://www.amplimo.nl

| | |
|------------------------|----------|
| HB | Oct 2010 |
| HB | Feb 2023 |
| © Copyright Amplimo BV | |

58019
toroidal transformer
160VA