






Toroidal transformer type 68010

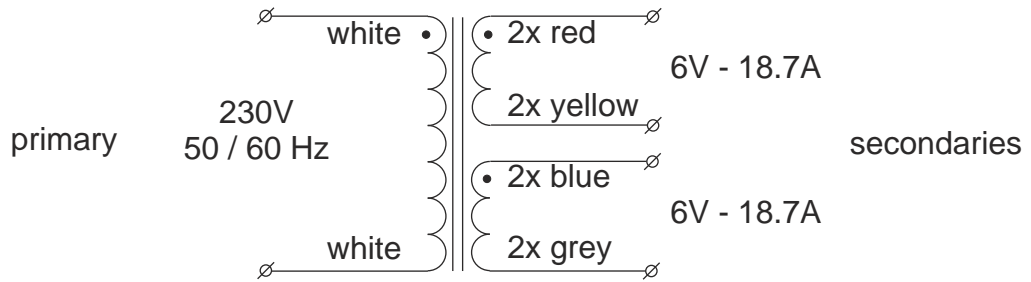

serial operation to double the secondary voltage

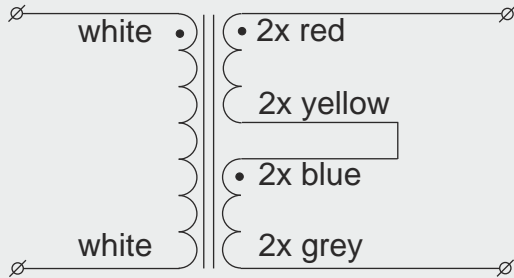

parallel operation to double the secondary current

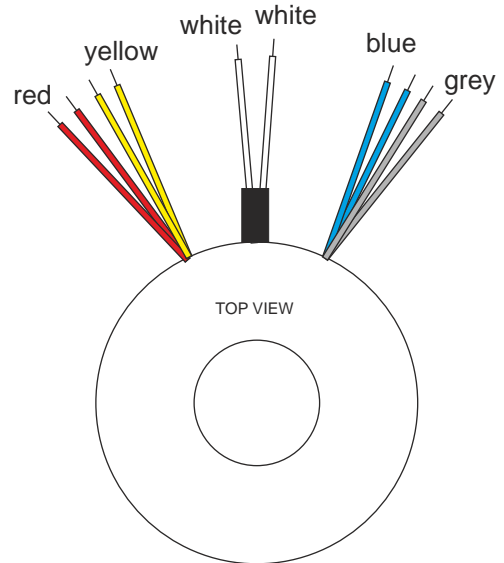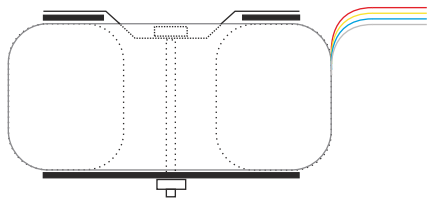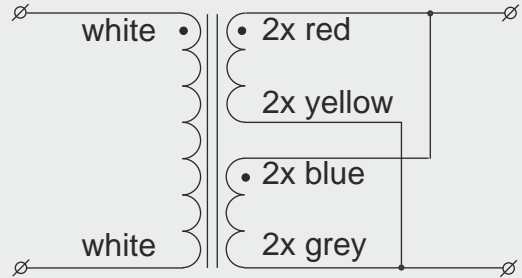


Power rating 225VA
 Primary voltage 230VAC - 50/60Hz
 Secondary voltages 2x 6V - 18.7A
 Regulation 7%

Diameter 110mm
 Height 52mm
 Weight 2.3kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø90mm
 2 neoprene washers Ø90mm
 1 bolt M5x50mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.
 Primary: 1A, 5x20mm, IEC127, high I²t value
 Secondary: none

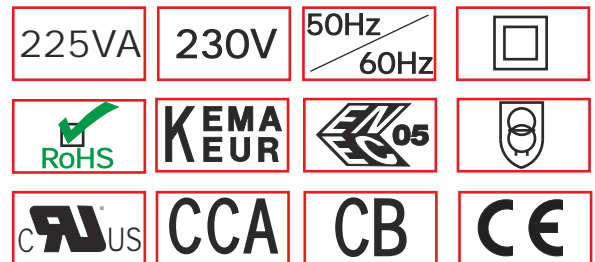

Industrieweg 14
 NL-7161BX NEEDE
 The Netherlands
 P O - B o x 2 7
 NL-7160AA NEEDE
 The Netherlands
 Tel.+31 (0)545 28 3456
 Fax+31 (0)545 28 3457
info@amplimo.nl
<http://www.amplimo.nl>

HB Oct 2010
 © Copyright Amplimo BV

68010
 toroidal transformer
 225VA