Toroidal transformer type 78025

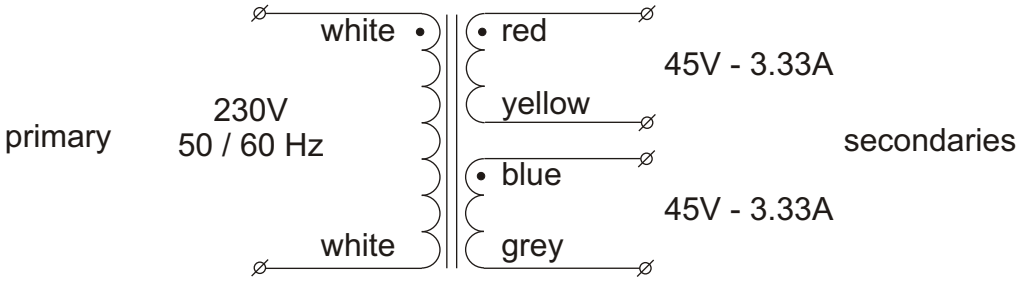

serial operation to
double the secondary voltage

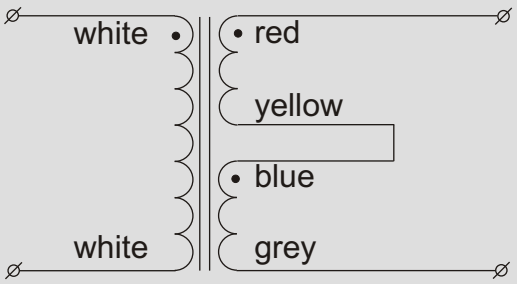

parallel operation to
double the secondary current

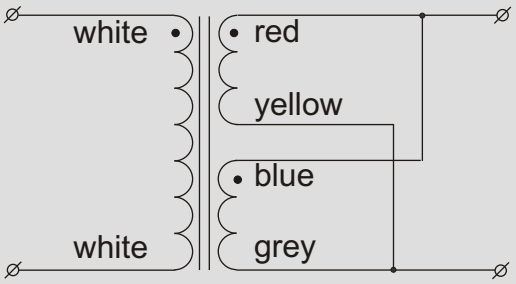

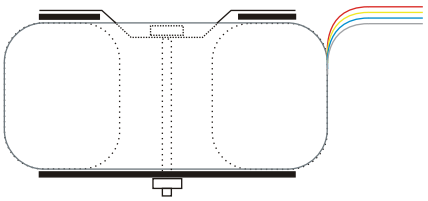

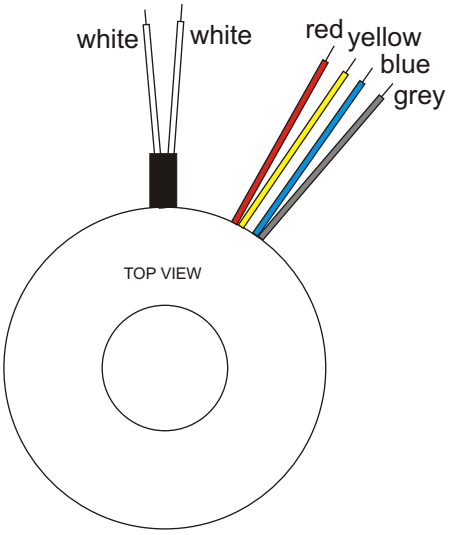

Power rating	300VA
Primary voltage	230VAC - 50/60Hz
Secondary voltages	2x 45V - 3.33A
Regulation	5%
Diameter	121mm
Height	56mm
Weight	2.9kg

Height and weight are measured without mounting materials
All leads are solid and approx 200mm long

Supplied mounting materials:
1 metal washer Ø90mm
2 neoprene washers Ø90mm
1 bolt M5x70mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.
Primary: 1.6A, 5x20mm, IEC127, high I²t value
Secondary: none

300VA | 230V | 50Hz / 60Hz | RoHS | KEMA KEUR | ENEC 05 | c UL us | CCA | CB | CE

AMPLIMO

Industrieweg 14
NL-7161BX NEEDE
The Netherlands

PO-Box 27
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 28 3456
Fax+31 (0)545 28 3457

info@amplimo.nl
http://www.amplimo.nl

HB	Oct 2010

© Copyright Amplimo BV

78025

toroidal transformer
300VA