






Toroidal transformer type 78070

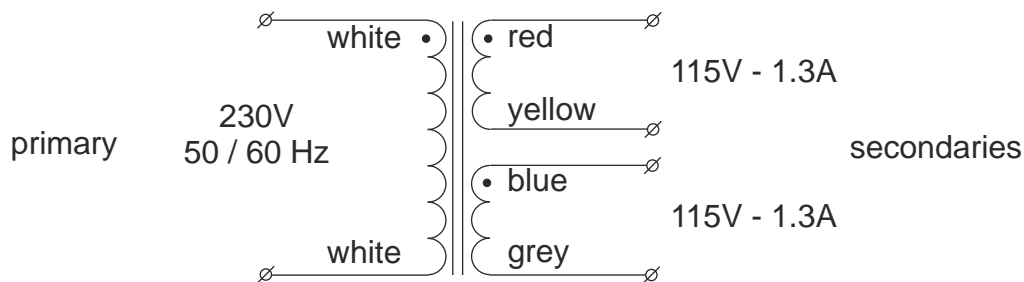

serial operation to double the secondary voltage

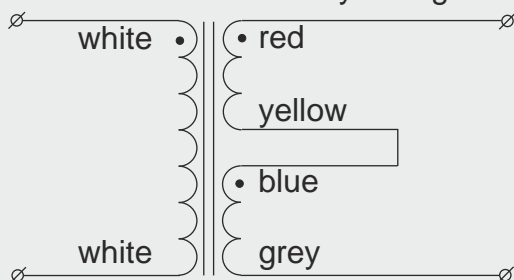

parallel operation to double the secondary current

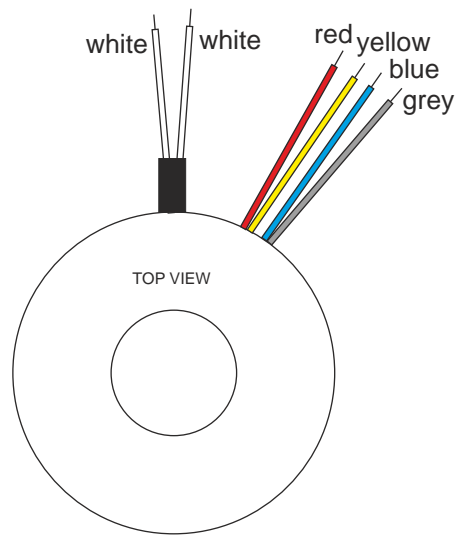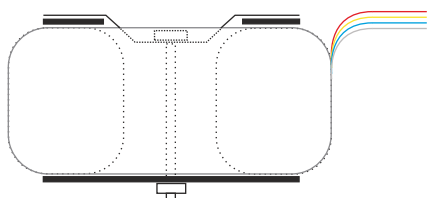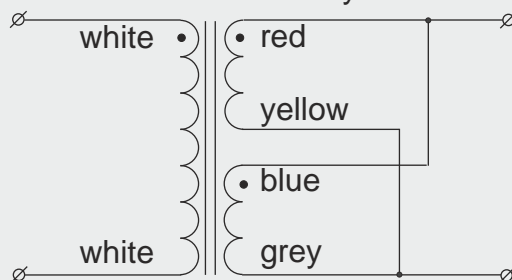

Power rating 300VA
 Primary voltage 230VAC - 50/60Hz
 Secondary voltages 2x 115V - 1.3A
 Regulation 5%

Diameter 121mm
 Height 56mm
 Weight 2.9kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø90mm
 2 neoprene washers Ø90mm
 1 bolt M5x70mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.
 Primary: 1.6A, 5x20mm, IEC127, high I²t value
 Secondary: none



Industrieweg 14
 NL-7161BX NEEDE
 The Netherlands

P O - B o x 2 7
 NL-7160AA NEEDE
 The Netherlands
 Tel.+31 (0)545 28 3456
 Fax+31 (0)545 28 3457

info@amplimo.nl
<http://www.amplimo.nl>

HB	Dec 2011
©	Copyright Amplimo BV

78070
 toroidal transformer
 300VA