






Toroidal transformer type 88015

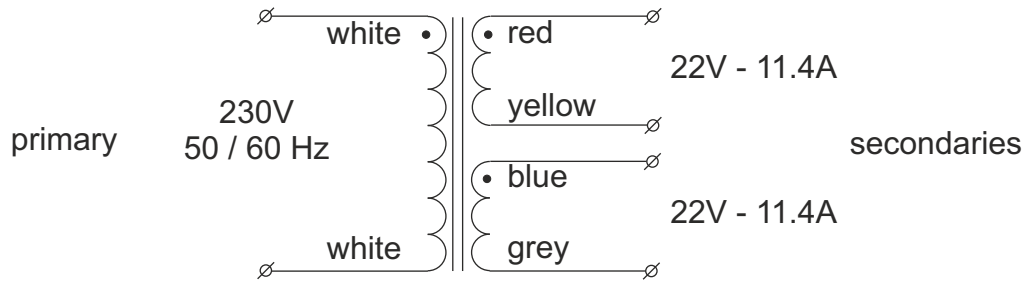

serial operation to double the secondary voltage

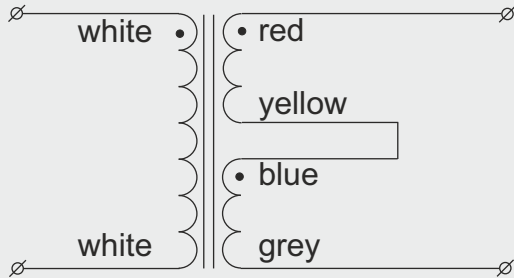

parallel operation to double the secondary current

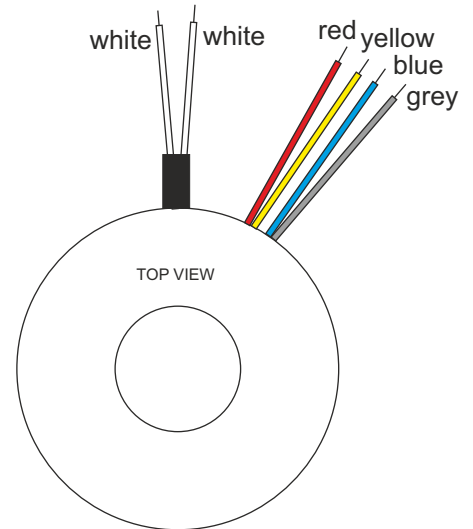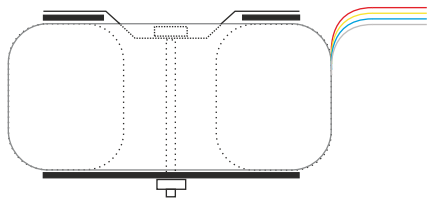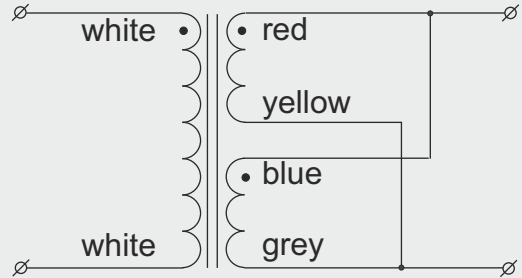


Power rating 500VA
 Primary voltage 230VAC - 50/60Hz
 Secondary voltages 2x 22V - 11.4A
 Regulation 4.5%

Diameter 135mm
 Height 63mm
 Weight 4.2kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø110mm
 2 neoprene washers Ø110mm
 1 bolt M8x70mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.01
 UL/CSA approvals, UL filenumber E320377.
 CE, RoHS-compliant

Time lag fuses to be used.
 Primary: 2.5A, 5x20mm, IEC127, high I²t value in series with two NTC resistors type NTC5.
 Secondary: none

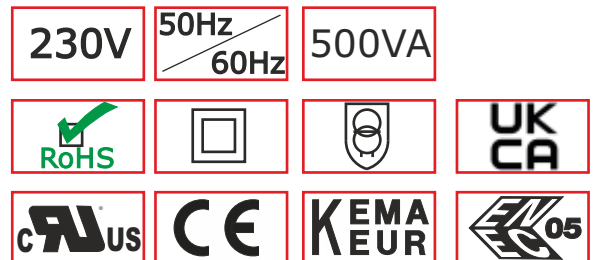

Industrieweg 14
 NL-7161BX NEEDE
 The Netherlands

 P O - B o x 2 7
 NL-7160AA NEEDE
 The Netherlands
 Tel.+31 (0)545 28 3456

 info@amplimo.nl
 https://www.amplimo.nl

| | |
|----|----------------------|
| HB | Oct 2010 |
| HB | Mar 2023 |
| | |
| | |
| © | Copyright Amplimo BV |

88015
 toroidal transformer
 500VA