
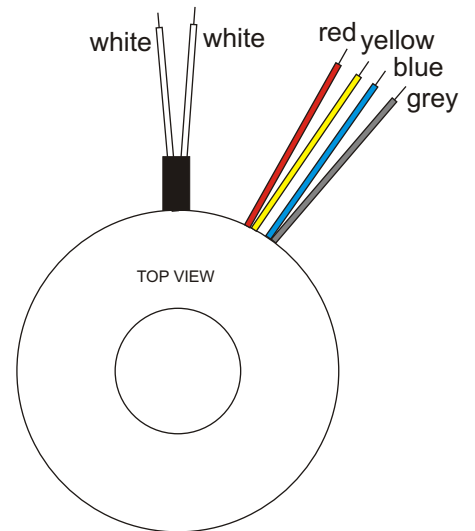
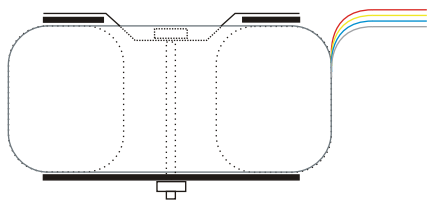
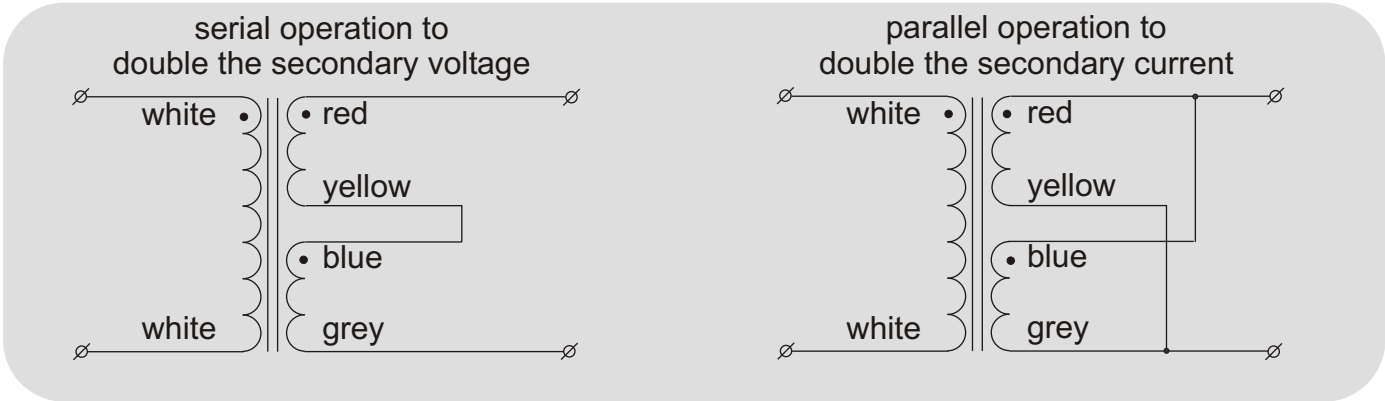


Toroidal transformer type 88017

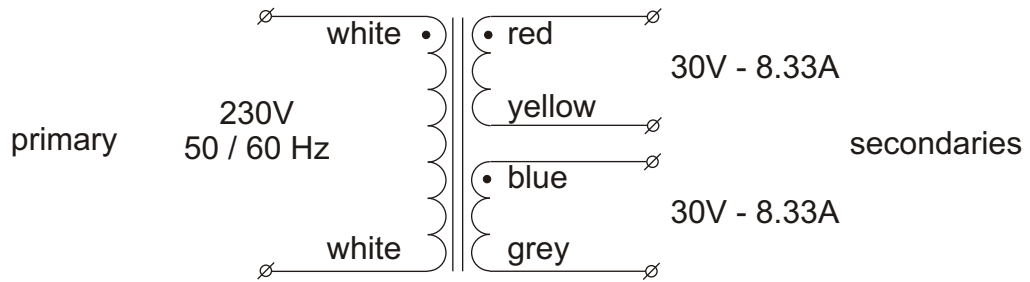


Power rating 500VA
Primary voltage 230VAC - 50/60Hz
Secondary voltages 2x 30V - 8.330A
Regulation 4.5%
Diameter 135mm
Height 63mm
Weight 4.2kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø110mm
 2 neoprene washers Ø110mm
 1 bolt M8x70mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.
 Primary: 2.5A, 5x20mm, IEC127, high I²t value in series with two NTC resistors type NTC5.
 Secondary: none



| | | | | |
|---|--|----|----------------------|--------------|
|  | Industrieweg 14 NL-7161BX NEEDE The Netherlands | HB | Oct 2010 | 88017 |
| | P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 28 3456 Fax+31 (0)545 28 3457 | | | |
| | info@amplimo.nl http://www.amplimo.nl | © | Copyright Amplimo BV | |
| | | | | |