






### Toroidal transformer type 88043

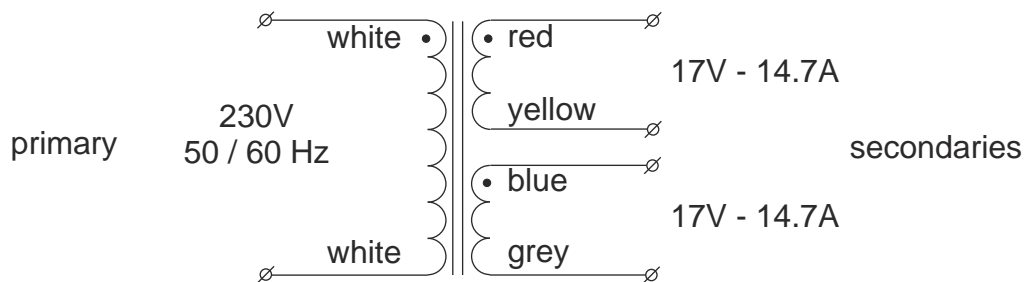

serial operation to double the secondary voltage

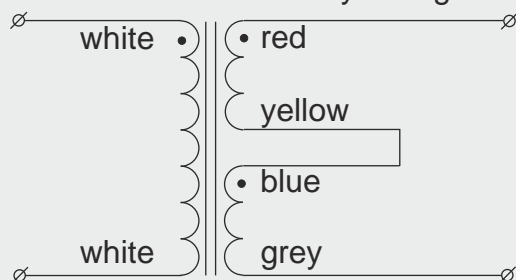

parallel operation to double the secondary current

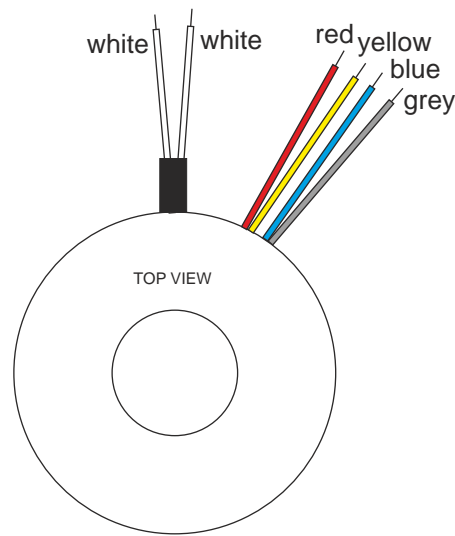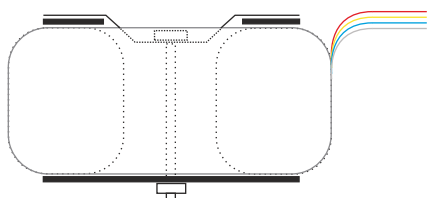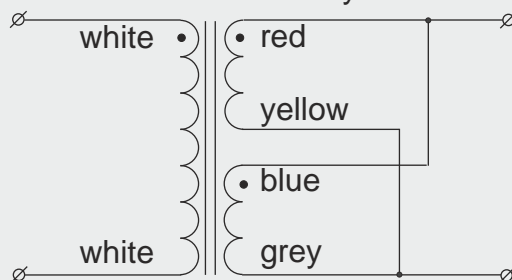

Power rating 500VA  
 Primary voltage 230VAC - 50/60Hz  
 Secondary voltages 2x 17V - 14.7A  
 Regulation 4.5%

Diameter 135mm  
 Height 63mm  
 Weight 4.2kg  
 Height and weight are measured without mounting materials  
 All leads are solid and approx 200mm long

Supplied mounting materials:  
 1 metal washer Ø110mm  
 2 neoprene washers Ø110mm  
 1 bolt M8x70mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals  
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.  
 Primary: 2.5A, 5x20mm, IEC127, high I<sup>2</sup>t value in series with two NTC resistors type NTC5.  
 Secondary: none



Industrieweg 14  
 NL-7161BX NEEDE  
 The Netherlands

P O - B o x 2 7  
 NL-7160AA NEEDE  
 The Netherlands  
 Tel.+31 (0)545 28 3456  
 Fax+31 (0)545 28 3457

info@amplimo.nl  
 http://www.amplimo.nl

HB Oct 2010  
 © Copyright Amplimo BV

**88043**  
 toroidal transformer  
 500VA