




## Toroidal transformer type Z8015



serial operation to  
double the secondary voltage

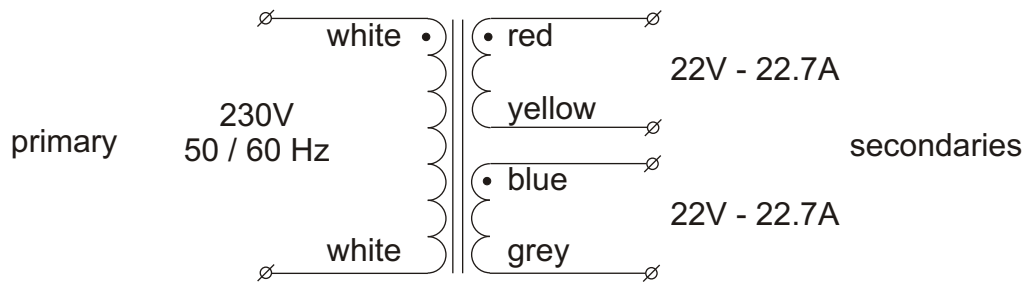

parallel operation to  
double the secondary current

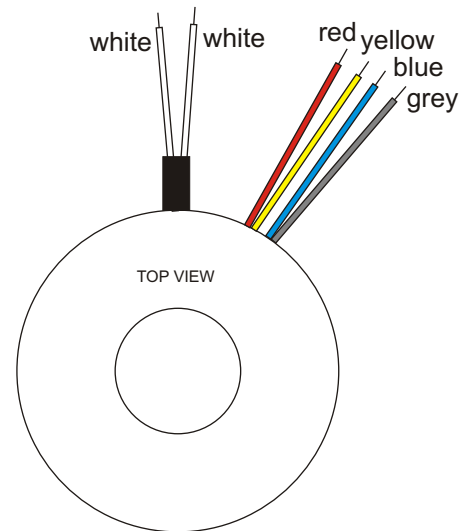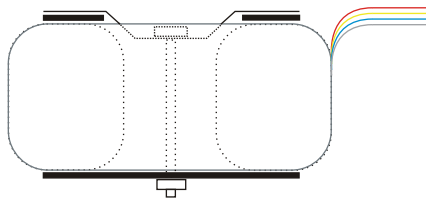

Power rating 1000VA  
Primary voltage 230VAC - 50/60Hz  
Secondary voltages 2x 22V -22.2A  
Regulation 3.5%

Diameter 160mm  
Height 72mm  
Weight 7.54kg

Height and weight are measured without mounting materials  
All leads are solid and approx 200mm long

Supplied mounting materials:

- 1 metal washer Ø110mm
- 2 neoprene washers Ø110mm
- 1 bolt M8x90mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals  
KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.

Primary: 5A, 5x20mm, IEC127, high I<sup>2</sup>t value in series with  
two NTC resistors type NTC5.

Secondary: none



Industrieweg 14  
NL-7161BX NEEDE  
The Netherlands

P O - B o x 2 7  
NL-7160AA NEEDE  
The Netherlands  
Tel.+31 (0)545 28 3456  
Fax+31 (0)545 28 3457

info@amplimo.nl  
http://www.amplimo.nl

HB

Oct 2010

**Z8015**

**toroidal transformer  
1000VA**

© Copyright Amplimo BV