






# Toroidal transformer type Z8016

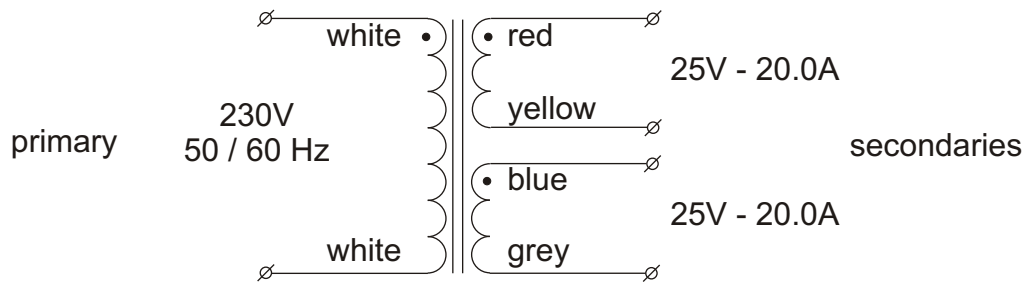

serial operation to double the secondary voltage

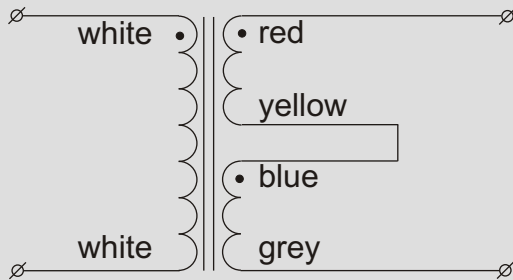

parallel operation to double the secondary current

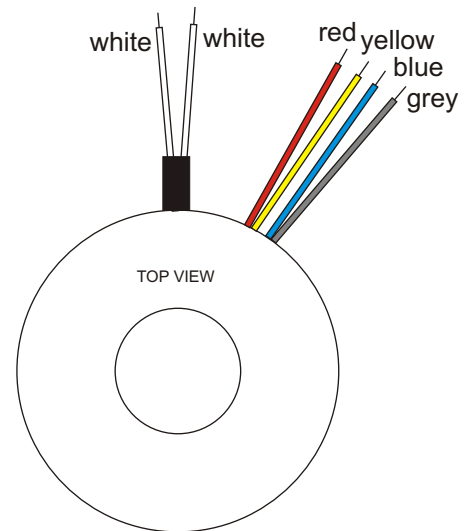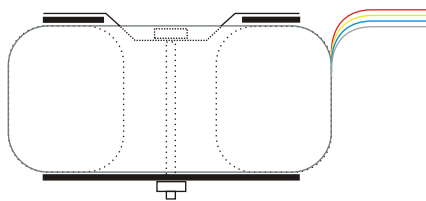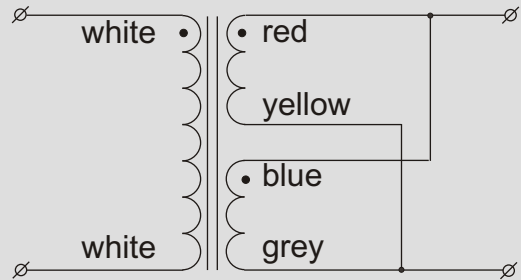

Power rating 1000VA  
 Primary voltage 230VAC - 50/60Hz  
 Secondary voltages 2x 25V -20.0A  
 Regulation 3.5%

Diameter 160mm  
 Height 72mm  
 Weight 7.54kg

Height and weight are measured without mounting materials  
 All leads are solid and approx 200mm long

Supplied mounting materials:  
 1 metal washer Ø110mm  
 2 neoprene washers Ø110mm  
 1 bolt M8x90mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals  
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.  
 Primary: 5A, 5x20mm, IEC127, high I<sup>2</sup>t value in series with two NTC resistors type NTC5.  
 Secondary: none



Industrieweg 14  
 NL-7161BX NEEDE  
 The Netherlands

P O - B o x 2 7  
 NL-7160AA NEEDE  
 The Netherlands  
 Tel.+31 (0)545 28 3456  
 Fax+31 (0)545 28 3457

info@amplimo.nl  
 http://www.amplimo.nl

HB	Oct 2010
©	Copyright Amplimo BV

**Z8016**  
 toroidal transformer  
 1000VA