






Toroidal transformer type Z8026

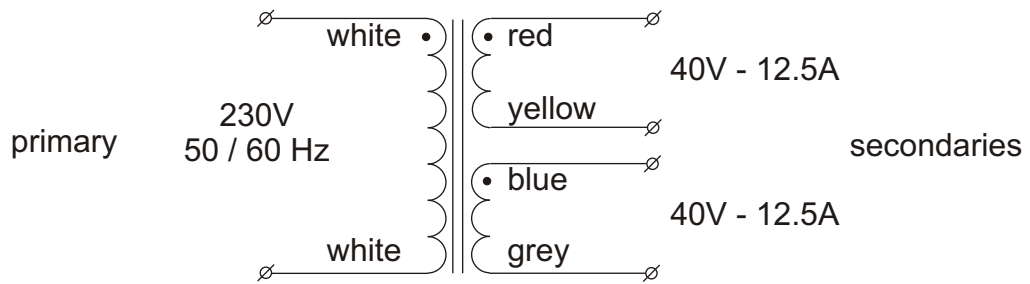

serial operation to
double the secondary voltage

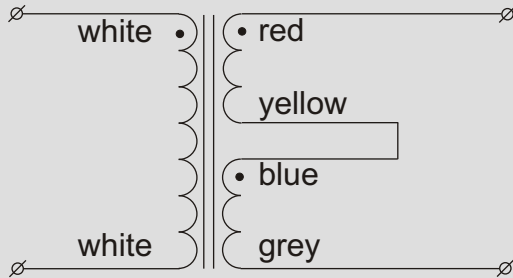

parallel operation to
double the secondary current

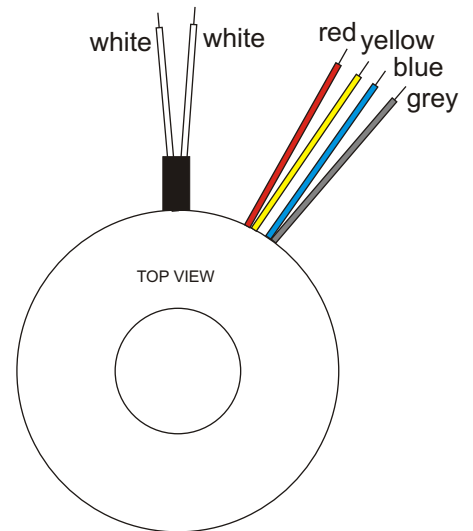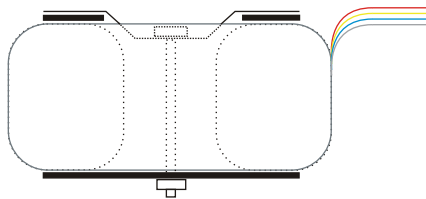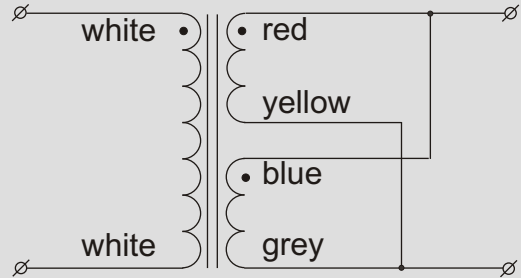

Power rating 1000VA
 Primary voltage 230VAC - 50/60Hz
 Secondary voltages 2x 40V -12.5A
 Regulation 3.5%

Diameter 160mm
 Height 72mm
 Weight 7.54kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø110mm
 2 neoprene washers Ø110mm
 1 bolt M8x90mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
 KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.
 Primary: 5A, 5x20mm, IEC127, high I²t value in series with
 two NTC resistors type NTC5.
 Secondary: none



Industrieweg 14
 NL-7161BX NEEDE
 The Netherlands

P O - B o x 2 7
 NL-7160AA NEEDE
 The Netherlands
 Tel.+31 (0)545 28 3456
 Fax+31 (0)545 28 3457

info@amplimo.nl
<http://www.amplimo.nl>

HB	Oct 2010
©	Copyright Amplimo BV

Z8026
toroidal transformer 1000VA