






Toroidal transformer type Z8070

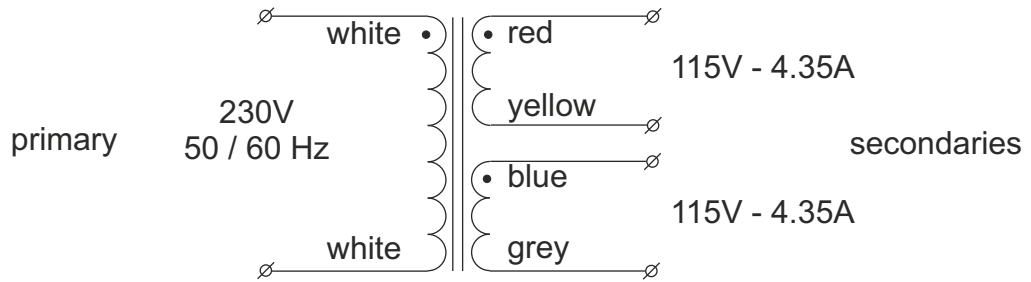

serial operation to double the secondary voltage

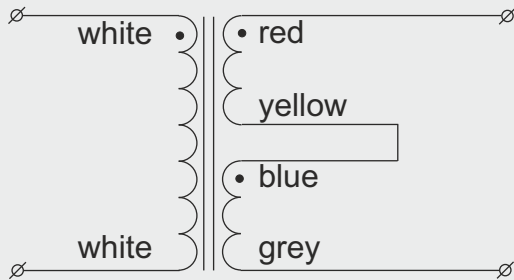

parallel operation to double the secondary current

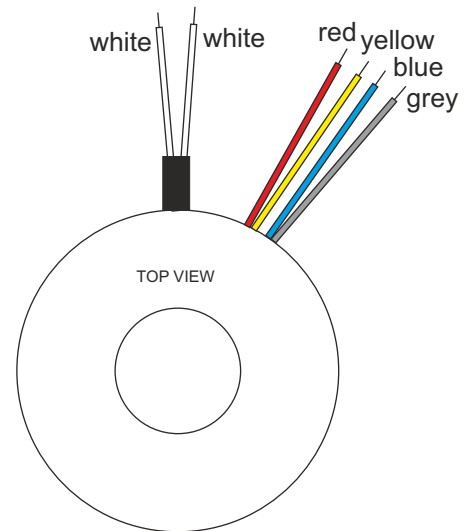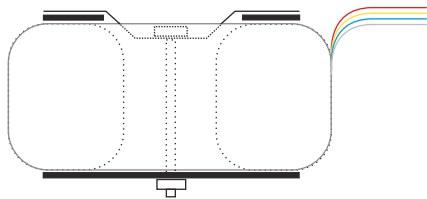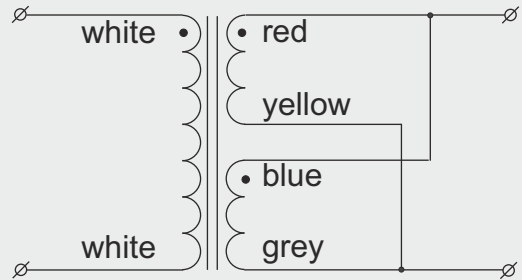


Power rating 1000VA
 Primary voltage 230VAC - 50/60Hz
 Secondary voltages 2x 115V - 4.35A
 Regulation 3.5%

Diameter 160mm
 Height 72mm
 Weight 7.54kg
 Height and weight are measured without mounting materials
 All leads are solid and approx 200mm long

Supplied mounting materials:
 1 metal washer Ø110mm
 2 neoprene washers Ø110mm
 1 bolt M8x90mm with nut

KEMA KEUR, ENEC approvals, certificate 2159403.02
 UL/CSA approvals, UL filenumber E320377.
 CE, RoHS-compliant

Time lag fuses to be used.
 Primary: 5A, 5x20mm, IEC127, high I²t value in series with two NTC resistors type NTC5.
 Secondary: none

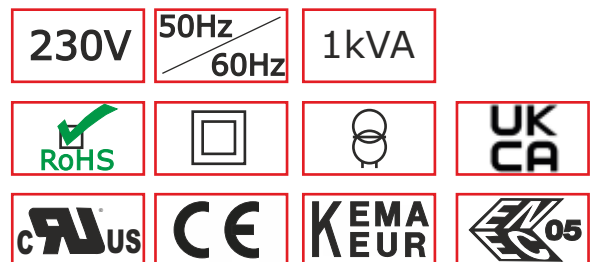

Industrieweg 14
 NL-7161BX NEEDE
 The Netherlands
 P O - B o x 2 7
 NL-7160AA NEEDE
 The Netherlands
 Tel.+31 (0)545 28 3456
 info@amplimo.nl
 https://www.amplimo.nl

HB	Oct 2010
HB	Apr 2023
© Copyright Amplimo BV	

Z8070
 toroidal transformer
 1000VA