




Toroidal transformer type Z8070



serial operation to
double the secondary voltage

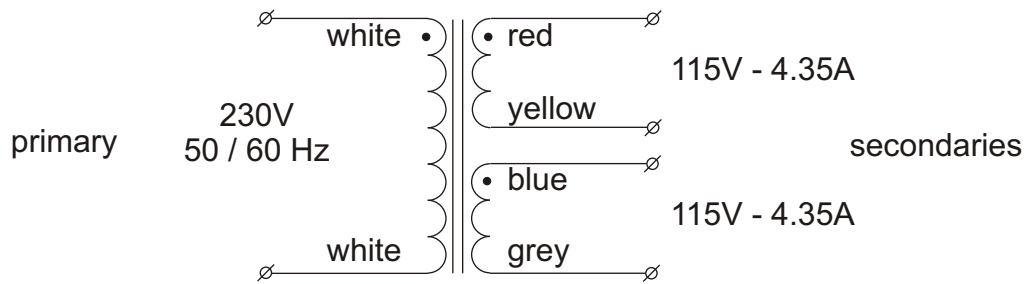

parallel operation to
double the secondary current

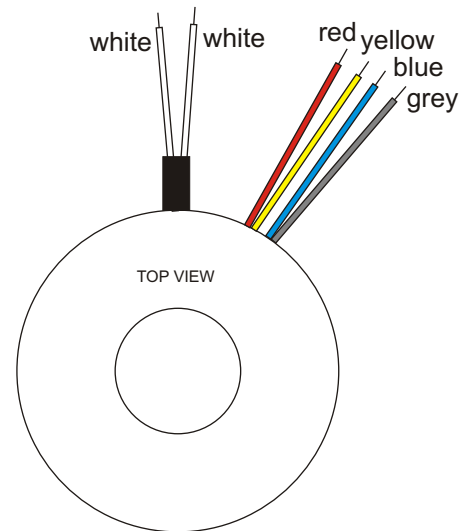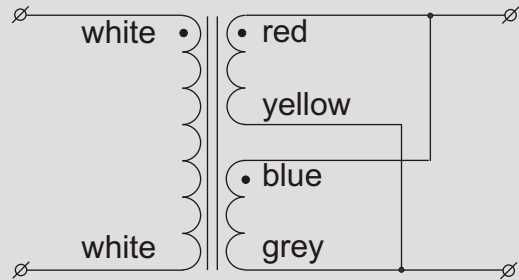

Power rating 1000VA
Primary voltage 230VAC - 50/60Hz
Secondary voltages 2x 115V - 4.35A
Regulation 3.5%

Diameter 160mm
Height 72mm
Weight 7.54kg

Height and weight are measured without mounting materials
All leads are solid and approx 200mm long

Supplied mounting materials:

- 1 metal washer Ø110mm
- 2 neoprene washers Ø110mm
- 1 bolt M8x90mm with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E320377.

Time lag fuses to be used.

Primary: 5A, 5x20mm, IEC127, high I²t value in series with
two NTC resistors type NTC5.

Secondary: none



Industrieweg 14
NL-7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 28 3456
Fax+31 (0)545 28 3457

info@amplimo.nl
http://www.amplimo.nl

HB

Oct 2010

Z8070

**toroidal transformer
1000VA**

© Copyright Amplimo BV