




## Toroidal transformer type 1N1729

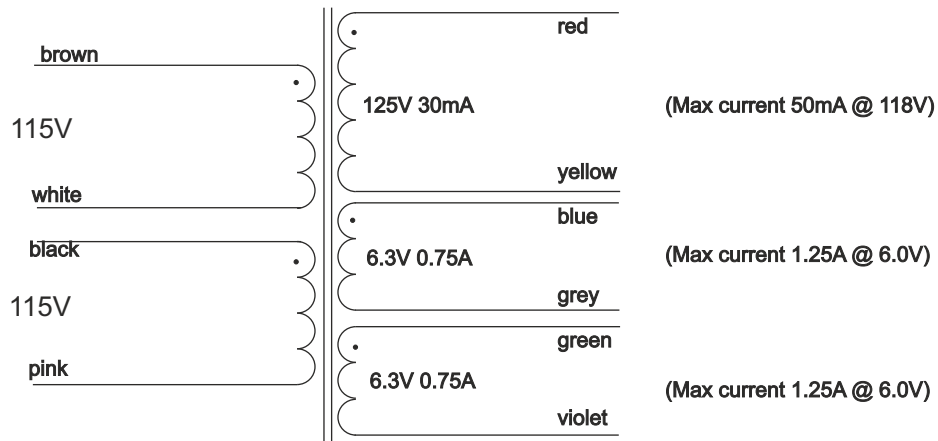

primaries in parallel  
for 115V operation



primaries in series  
for 230V operation



Diameter 70 mm  
Height 32 mm  
Weight 0.44kg  
Height and weight are measured without mounting materials  
All leads are solid and approx.200mm long

Supplied mounting materials:

- 1 metal washer Ø5cm
- 2 neoprene washers Ø5cm
- 1 bolt M5x40 with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals  
KEMA certificate 96 2307, UL filenumber E320377.



Time lag fuses to be used.

Primary:


For 230V mains : 0.16A 5x20mm IEC127 high I<sup>2</sup>t-value.

For 115V mains: 0.315A 5x20mm IEC127 high I<sup>2</sup>t-value.

Secondary: additional protection required for each secondary

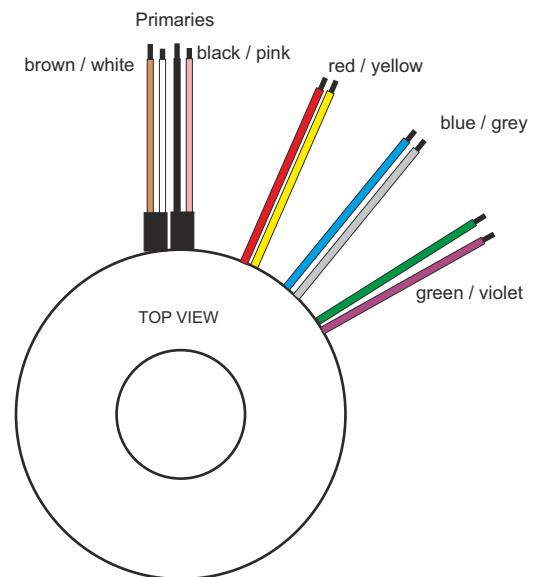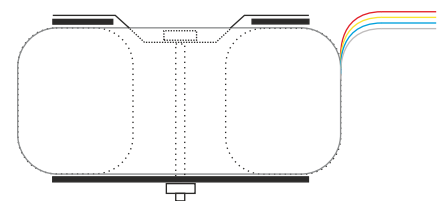

Type number	primary	secondaries	
		voltage	current
1N1729	2x 115V	125V	30mA
		6.3V	0.75A
		6.3V	0.75A
All voltages are under full ohmic load.			
Regulation : 8.5%			
Max. power rating : 22VA			

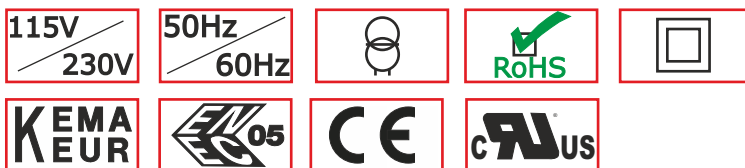

	Industrieweg 14 NL-7161BX NEEDE The Netherlands	HB	April 2009	<b>1N1729</b>
	P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 283456			
	<a href="mailto:info@amplimo.nl">info@amplimo.nl</a> <a href="http://www.amplimo.nl">http://www.amplimo.nl</a>			toroidal power transformer for valve-amplifiers
© Copyright Amplimo BV				