

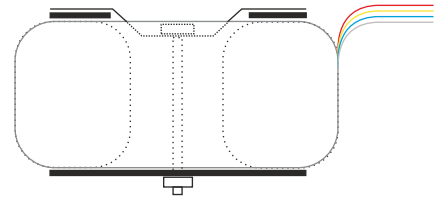



Toroidal transformer type 2N1357

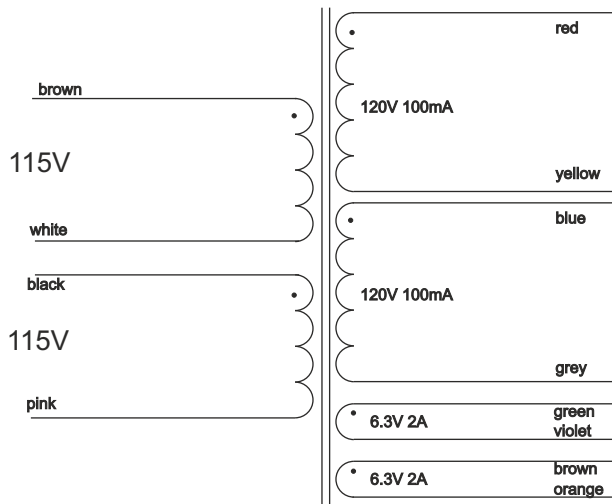

primaries in parallel
for 115V operation



primaries in series
for 230V operation



Diameter 82 mm
Height 39mm
Weight 0.75kg

Height and weight are measured without mounting materials
All leads are solid and approx.200mm long

Supplied mounting materials:

- 1 metal washer Ø7cm
- 2 neoprene washers Ø7cm
- 1 bolt M5x50 with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals
KEMA certificate 96 2307, UL filenumber E320377.


Time lag fuses to be used.

Primary:

For 115V mains : 0.5A 5x20mm IEC127 high I²t-value.


For 230V mains: 0.25A 5x20mm IEC127 high I²t-value.

Secondary: additional protection required for each secondary

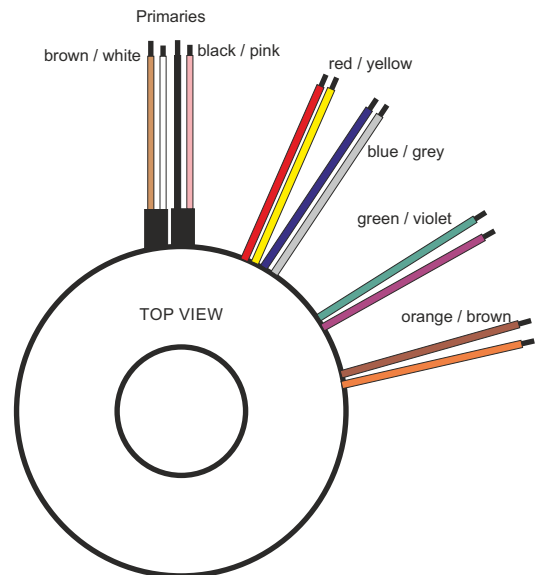

Type number	primary	secondaries	
		voltage	current
2N1357	2x 115V	120V	100mA
		120V	100mA
		6.3V	2A
		6.3V	2A

All voltages are under full ohmic load.
Regulation : 12%



Amendments:

January 2016 : secondaries 3&4 was 1x12V

	Industrieweg 14 NL-7161BX NEEDE The Netherlands P O - B o x 2 7 NL-7160AA NEEDE The Netherlands Tel.+31 (0)545 283456 Fax+31 (0)545 283457 info@amplimo.nl http://www.amplimo.nl	HB HB	February 2003 January 2016	<h1>2N1357</h1> <p>toroidal power transformer for valve-amplifiers</p>
	© Copyright Amplimo BV			