





# Toroidal transformer type 2N465

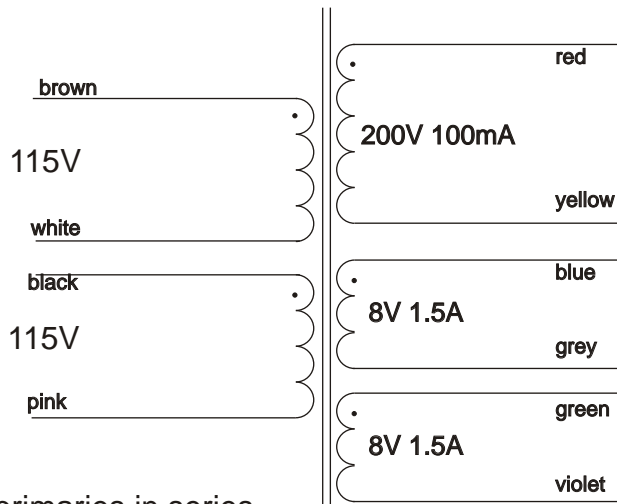

primaries in parallel for 115V operation



primaries in series for 230V operation

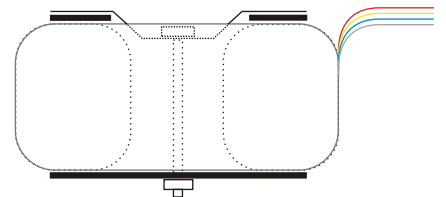

Diameter 82 mm  
Height 39mm  
Weight 0.75kg

Height and weight are measured without mounting materials  
All leads are solid and approx.200mm long

Supplied mounting materials:

- 1 metal washer Ø7cm
- 2 neoprene washers Ø7cm
- 1 bolt M5x50 with nut

With KEMA KEUR, ENEC, CE and UL/CSA approvals  
KEMA certificate 96 2307, UL filenumber E320377.


Time lag fuses to be used.

Primary:

For 115V mains : 0.5A 5x20mm IEC127 high I<sup>2</sup>t-value.


For 230V mains: 0.25A 5x20mm IEC127 high I<sup>2</sup>t-value.

Secondary: additional protection required for each secondary

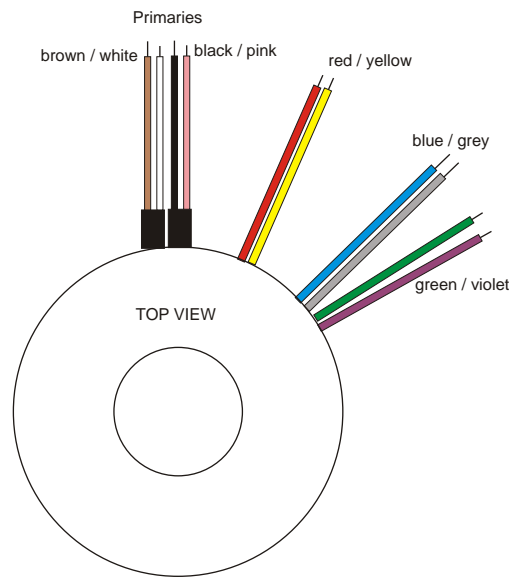

Type number	primary	secondaries	
		voltage	current
2N465	2x 115V	200V	100mA
		8V	1.5A
		8V	1.5A

All voltages are under full ohmic load.  
Regulation : 12%



Industrieweg 14  
NL-7161BX NEEDE  
The Netherlands  
  
P O - B o x 2 7  
NL-7160AA NEEDE  
The Netherlands  
Tel.+31 (0)545 283456  
Fax+31 (0)545 283457  
  
info@amplimo.nl  
http://www.amplimo.nl

HB April 2010  
  
  
  
  
© Copyright Amplimo BV

**2N465**  
  
toroidal power transformer  
for valve-amplifiers