



AMPLIFIER MODULES
VERSTERKER MODULEN
TOROIDAL TRANSFORMERS
RINGKERN TRANSFORMATOREN

Amplimo BV
Industrieweg 14
NL-7161BX NEEDE
The Netherlands

Telefoon +31 545 28 3456
Fax +31 545 28 3457
Internet www.amplimo.nl
email info@amplimo.nl


Po-Box 27
7160AA NEEDE
The Netherlands

Girorekening 38.12.499
Rabobank rekening 31.33.11.250
IBAN NL36RABO0313311250
Handelsregister Enschede 06087186
VAT nr. NL8071.67915B01

AMPLIMO

Toroidal power-transformer type 6N536P for valve amplifiers

CONNECTIONS			
Primaries	115V 50/60Hz	brown - pink	
	115V 50/60Hz	brown - pink	
	for 115V operation connect both primary windings in parallel (connect brown to brown, connect pink to pink) for 230V operation connect both primary windings in series (connect pink-primary-1 to brown-primary-2)		
Secondaries	280V 0.6A	red - yellow	
	6.3V 7A	blue - grey	
Regulation approx. 7%			
With KEMA KEUR, ENEC, CE and UL/CSA approvals.			

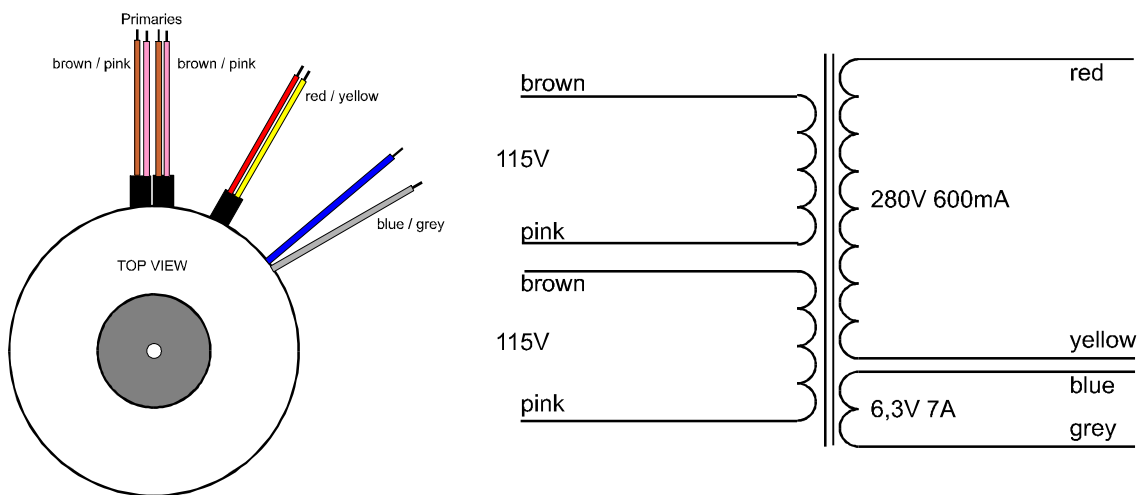

DIMENSIONS			
Outer diameter	approx.	114 mm	
Inner diameter	approx.	5 mm	potted centre with 5.5mm hole
Height excl. mounting materials	approx.	54 mm	
Weight	approx.	2.4kg	
Lead type	all leads solid		
Lead length	approx.	200mm	

6N536P, January 2003