


Toroidal transformer type 67615


primaries

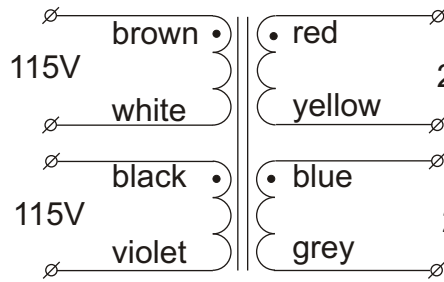


secondaries

primary

primaries in parallel
for 115V operation




primaries in series
for 230V operation




secondary



parallel operation
to double the
secondary current



serial operation
to double the
secondary voltage



brown/white black/violet
red yellow
blue grey

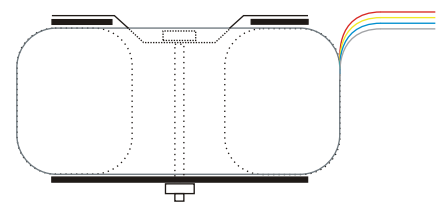

Diameter approx. 115mm
Height approx. 50mm
Weight approx. 2.2kg
Height and weight are measured without mounting materials
All leads approx. 200mm long

Supplied mounting materials:

- 1 metal washer
- 2 neoprene washers
- 1 bolt with nut

according to EN61558. With CE and UL/CSA approvals
UL filenumber E311200.
RoHS-compliant

Type number	primary	secondaries voltage	current
67615	2x115V	2x 22V	5.11A

All voltages are under full ohmic load
Regulation : 7.0%

P/N AMP-0225022
TYPE 67615
BATCH 00000
MADE IN CHINA

50/60Hz

E311200

PRI. 2x 115VAC BROWN-WHITE / BLACK-VIOLET
SEC. 2x 22VAC 5.11A RED-YELLOW / BLUE-GREY



Industrieweg 14
7161BX NEEDE
The Netherlands

P O - B o x 2 7
NL-7160AA NEEDE
The Netherlands
Tel.+31 (0)545 283456
Fax+31 (0)545 283457
info@amplimo.nl
http://www.amplimo.nl

HB

26 Feb 2007

67615

P/N: AMP-0225022

toroidal transformer
225VA

© Copyright Amplimo BV